



MACHINE TOOLS



NITTO KOHKI



POWER TOOLS

Electric & Hydraulic Machine Tools, Labor-saving plus Improved Work Efficiency!

***A wide range of unique tools for boring, punching,
beveling and machining.***

MACHINE TOOLS LINE-UP

PORTABLE MAGNETIC BASE DRILLING MACHINE

**ATRA ACE AUTO
ATRA ACE QUICK AUTO
ATRA ACE MANUAL FEED**

TUNGSTEN CARBIDE TIPPED & H.S.S ANNULAR CUTTERS

**JETBROACH
HI-BROACH**

PORTABLE MAGNETIC DRILL STAND


ATRA MASTER

PORTABLE HYDRAULIC PUNCHER

**SELFER ACE HS SERIES
SELFER HA SERIES
HANDY SELFER**

PORTABLE BEVELING TOOL

**HAND BEVELER
MINI BEVELER
CIRCUIT BEVELER**

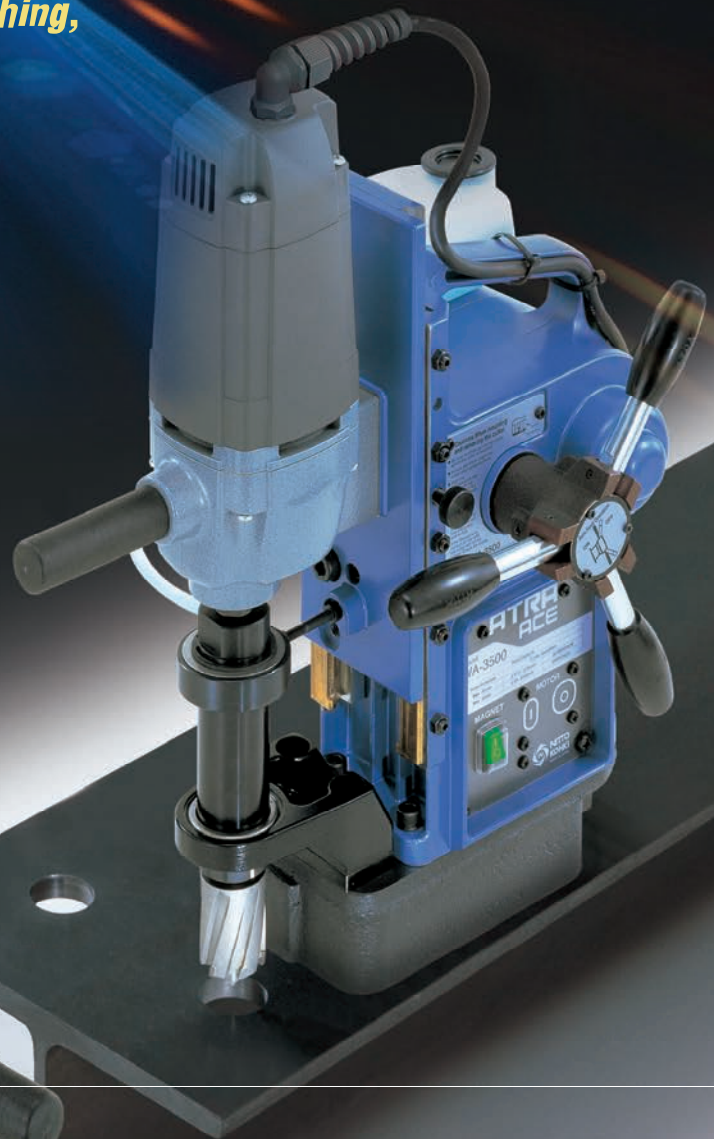

MACHINE TOOLS CONTENTS

Whether you just glance through this booklet or give it an intensive reading, we are sure you'll agree that NITTO KOHKI's portable hydraulic and electric machines, couplers and pneumatic hand tools are among the finest precision engineered equipment found today.

ONE YEAR LIMITED WARRANTY!

	Manufacturing	Steel Fabricating	Welding	Metal Casting & Forging	Automotive & Ship Building	Construction	Page
PORTABLE MAGNETIC BASE AUTOMATIC DRILLING MACHINE ATRA ACE AUTO (WA-3500/WA-5000)	Speedy, high precision hole drilling	Speedy, high precision hole drilling	—	—	Drilling holes through steel	Drilling holes through shaped steel	7
PORTABLE MAGNETIC BASE AUTOMATIC DRILLING MACHINE ATRA ACE QUICK AUTO AND MANUAL FEED	Speedy, high precision hole drilling	Speedy, high precision hole drilling	—	—	Drilling holes through steel	Drilling holes through shaped steel	8-9
PORTABLE MAGNETIC DRILL STAND ATRA MASTER	Precision drilling through flanges	Drilling	Initial drilling for sheet cutting by welder	Versatile drilling	Various drilling	Drilling through shaped steel, drilling at elevated site	10
ANNULAR CUTTERS BROACH CUTTERS & BROACH HOLDERS	Drilling of large and small diameter holes through steel	Drilling holes through steel	—	—	Drilling holes	Drilling of large and small diameter holes through steel	11-12
PORTABLE DOUBLE ACTING HYDRAULIC PUNCHER SELFER ACE HS SERIES AND HYDRAULIC PUMP	Hole punching through steel plates	Punching bolt holes through steel plates	—	—	Punching holes through ship frameworks	On-site punching holes through shaped steel	13
PORTABLE SINGLE ACTING HYDRAULIC PUNCHER SELFER HA SERIES AND HYDRAULIC PUMP	Hole punching through steel plates	Punching bolt holes through steel plates	—	—	Punching holes through ship frameworks	On-site punching holes through shaped steel	14
ELECTRICALLY OPERATED HYDRAULIC PUNCHER HANDY SELFER PUNCHES AND DIES FOR SELFER	Speedy, easy hole punching through steel sheets	Punching holes through angles and channels	—	—	—	On-site small hole punching	15-16
PORTABLE BEVELING TOOLS BEVELER HAND BEVELER	Beveling of large workpieces	Beveling of steel plates	—	—	—	Beveling of columns	17
TIGON Spring Balancers and Retractors							18

Pneumatic & Electric Power Tools, Labor-saving plus Improved Work Efficiency!

POWER TOOLS



Whether you just glance through this booklet or give it an intensive reading, we are sure you'll agree that NITTO KOHKI's portable hydraulic and electric machines, couplings and pneumatic hand tools are among the finest precision engineered equipment to be found today.

ONE YEAR LIMITED WARRANTY!

	Manufacturing	Sheet-Metal Working	
NEEDLE SCALER JET CHISEL	Various peening works	Paint & rust scaling	
PNEUMATIC SCALER SUPER KELEN	—	—	
PNEUMATIC CHIPPING HAMMER AIR CHIPPER	—	—	
PNEUMATIC GRINDER AND SANDER MYTON	Sanding, grinding, chamfering, finishing	Chamfering, rough grinding, mold grinding	
PNEUMATIC DIE GRINDER AIR SONIC	Metal working, surface smoothing	Various grinding work	
PNEUMATIC HAND DRILL AIR DRILL	Various drilling work	Various drilling work	
PNEUMATIC BELT SANDER BELTON/BABY BELTON	Trimming, chamfering, corner rounding	Spot smoothing, surface regulation, finish sanding	
PORTABLE CHAMFERING TOOLS BEVELER	Chamfering of large workpieces	—	
PNEUMATIC RADIAL CHAMFERING TOOL CIRCUIT BEVELER	Chamfering of dies and machine	Chamfering of steel plate	
PORTABLE PRECISION FINISHING FILE SUPER HAND	Precision filing of flash, chamfering, sanding, groove finishing	Trimming, filing in narrow space, surface regulation	
PORTABLE FINE FINISHING FILE MICRO AIR HAND	Precision filing of flash, chamfering, groove finishing	—	
PNEUMATIC HACKSAW SUPER SAW	Cuts with small radii	Cutting of mild steel plates, aluminum, plastics and other materials	
HANDY PNEUMATIC SANDER FREE SANDER	Surface sanding, rust & stain removal	Spot smoothing, corner rounding, surface smoothing	
PNEUMATIC RECIPROCATING SANDER LINE SANDER	Plane sanding, groove sanding	Spot smoothing, surface regulation	
PNEUMATIC DUST-FREE SANDER ORBITAL SANDER	Smoothing, intermediate finish sanding	Surface smoothing of steel products, finishing of pressed products	
PNEUMATIC COMPACT SANDER PALM ORBITAL SANDER	Smoothing, intermediate finish sanding	Surface smoothing of steel products, finishing of pressed products	



NOTES ON USING TOOLS – Important Safety Instructions

HI CUPLA Series

"delvo" Electric Screwdrivers,
Linear Motor Driven Free Piston Systems

POWER TOOLS CONTENTS

	Welding	Painting	Metal Casting & Forging	Automotive & Ship Building	Chemical Engineering	Wood Working & Art	Construction	Page
	Spatter, chips & sludge scaling	—	Sand blasting & chiseling	Rust scaling, welded-part finish	—	—	Surface coarsening of stone and concrete products	19-20
	Spatter, sludge and rust chiseling, scaling	Paint chiseling	Black surface scaling, scaling of ingot remnant in ladle	Removal of weeds, shells, concrete chipping	—	—	Concrete chiseling from framework, removal of linoleum from floor base	21
	—	Paint chipping	Sand chipping	Removal of weeds, shells, etc., concrete chipping	—	—	Chipping of stone products	22
	Bead grinding, cross section grinding	Grinding of pre-painted surface, buffing	Trimming, chamfering	Additional grinding, rust removal, surface smoothing	—	Sanding	Chamfering of stone products, honing	23-24
	Bead grinding	Pre-painted surface regulation	Mold correction, trimming	Precision grinding of parts	Grinding of pipe cross section and inner surface	Correction grinding of molded products, rough grinding	Additional grinding of construction materials & parts	25-26
	Initial boring for gas cutting by welder	Paint scrambling (w/attachment)	—	Drilling, removal of spot-welded parts	—	Drilling	Sash work	26
	Bead grinding, rust removal, chamfering, section finishing	Rough grinding, rust & paint removal, spot smoothing	Trimming, chamfering, spatter grinding, die-cast finishing	Welding chip grinding, finish grinding, fitting	Grinding of pipe & equipment surface face section	Finish sanding of furniture, profile correction of plastic products	Grinding of parts & elements, repair services of tools	27-28
	Surface chamfering of pre-welded shaped steel parts	Chamfering of steel plate	Chamfering of cast molds	Chamfering of steel plate	—	—	Chamfering of columns (HB-15B)	29-30
	—	—	—	—	—	—	Chamfering of steel plate	29-30
	Finish filing	Precision filing of pre-painted surface, sanding	Trimming	Trimming, precision sanding of parts	Filing, superfine filing for profile correction	Filing, superfine filing for profile correction	Correction sanding of metal parts	31
	—	—	Trimming	Trimming, precision sanding of parts	Filing, superfine filing for profile correction	—	—	32
	—	—	—	Cutting of body panels of automotive vehicles or shaped steel	Cutting of fiber plates. Cutting of fiber-reinforced plastic plates	—	—	32
	—	Sanding of pre-painted, plastered surface, water sanding	Mold correction	Paint sanding of automotive body	Sanding of plastered surface, and test piece surface	Finish sanding, curved surface sanding, sanding of router groove	Sanding of stone products and floor materials	33
	—	Sanding of plastered surface, intermediate finish sanding	Mold correction	Paint sanding of automotive body	Synthetic resin sanding	Rough finish sanding	Inner surface sanding of channeled parts	34
	Surface sanding of pre-welded part	Ground work sanding	Trimming, surface finishing of die-casting	Correction of grinding (finish work)	Precision finishing	Precision sanding	Surface sanding of constructed materials	35
	Surface sanding of pre-welded part	Ground work sanding	Trimming, surface finishing of die-casting	Correction of grinding (finish work)	Precision finishing	Precision sanding	Surface sanding of constructed materials	35
								36
								37
								38

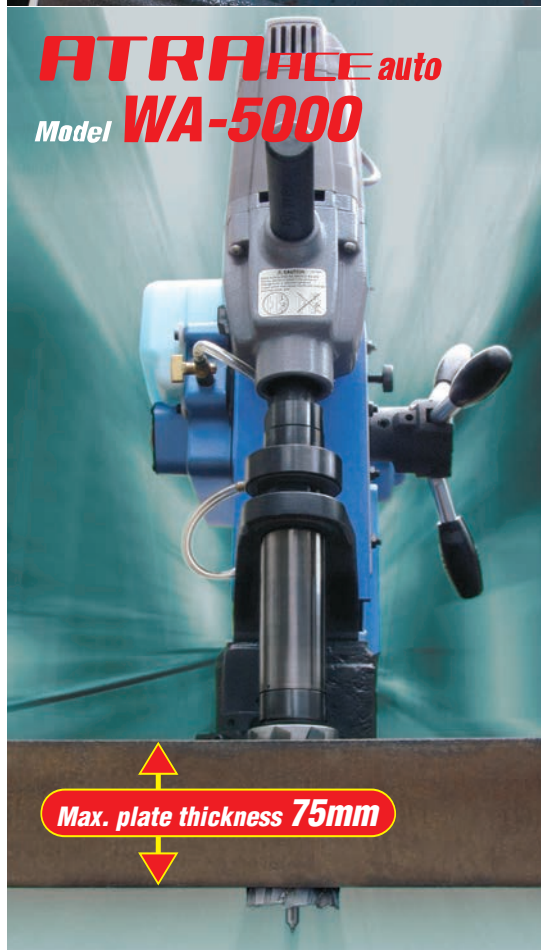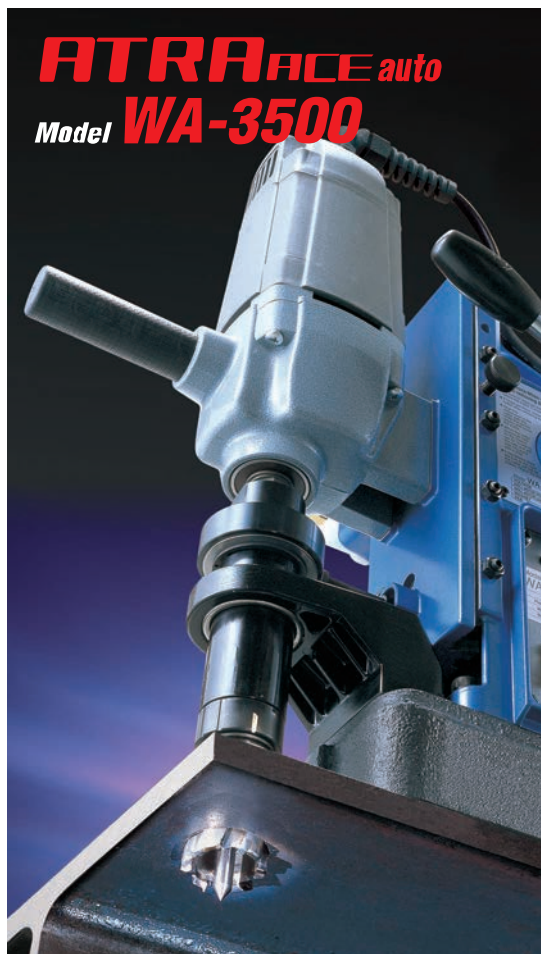

High-performance mechanism & high-tech components

One-touch Cutter Replacement

Replacement is quick and easy with our unique push fit self-centering cutter system.



Mounting the cutter

Removing the cutter

Improved Bearing Bracket

Our precision bearing bracket aligns cutters precisely, which increases cutter life.



Bearing Bracket

Coolant into the Heart of the Cut

Coolant is fed directly to the inside of the cut. The coolant system also features an auto shut-off.




One-touch Cartridge-type Oil Tank (QA Series)

Our big 24oz cartridge-type oil tank makes it easy to maintain proper coolant levels. There is also an adjustable flow valve on the machine, which allows the user to control the amount of coolant that is being applied to the cutter. Everything on this tool is made to operate quickly and accurately.



Chip Breaker Prevents Cutter from Jamming

Our new chip breaker prevents the cutter from becoming jammed with metal shavings.



Fail-Safe Protection

Built-in Motion Sensor

If any lateral movement or excess vibration is detected, both the drill and the feed motor stop instantly. Nitto Kohki is the first company to incorporate this feature into magnetic base drills.

Fail-safe Restart

The drill will not re-start even if power is re-supplied after accidental shutdown. Drilling can only be continued after turning on the drill switch.

Magnet Open-circuit Sensor

The drill will not start until the magnetic field is active.

Power Failure Safety

ATRA ACE Automatic Drills temporarily remain on the material after an interruption in power to prevent the drill from spinning off the material. This helps prevent the drill from breaking free from the material and possibly damaging the machine, cutter or even injuring the user.


New drill control prevents cutters from breaking

Slow Start Mechanism

The feed speed is reduced for the first few seconds after boring begins to ensure a smooth cut through the mill scale.

Auto-feed

Automatic control & feed are activated by simply pushing the feed handle to engage the gears.



Load Sensor

The dual sensing system responds to both drilling and feeding forces on the cutter for the optimum cutting condition.

Variable Automatic Feed

The feed speed is continuously monitored and updated proportionally to the load on the cutter.

Step Feed


When cutting through difficult materials, the load sensor will automatically activate the Step Feed Program to help penetrate material.

Auto-return Function (QA Series)

Once drilling is completed and the slug is ejected from the hole, the cutting bit is quickly retracted. This quick drill motor retraction allows the user to move on to the next hole more quickly.

Limit Switch

The ATRA ACE Automatic Drills utilize a limit switch that resets the machine when it retracts to the starting position after hole completion, also shuts down the motors in the event of an over-travel at the bottom of the stroke.


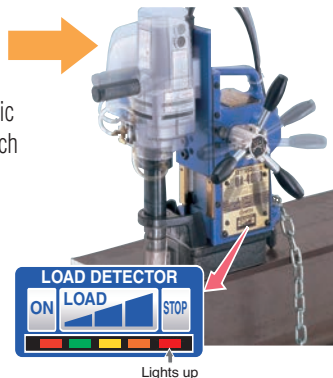


Cycle Stop (WA Series)

After the cut has finished, a detector responds to the reduction in load and both the drill and the feed motor automatically stop.

Overload Stop

When an excessive load is applied to the cutter, both the drill and the feed motor will stop automatically to prevent the cutter from breaking.

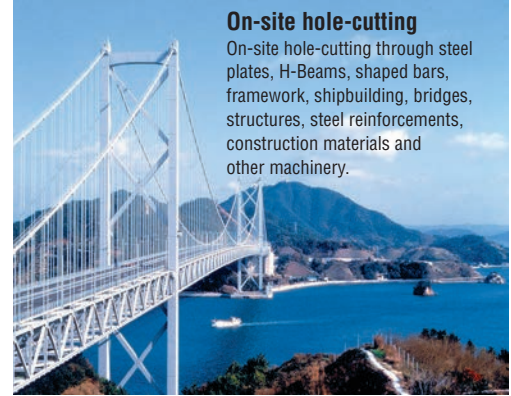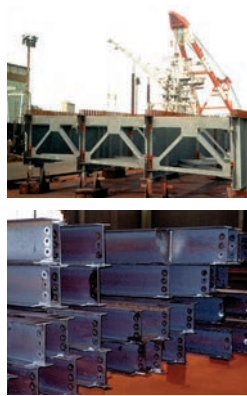

On-site hole-cutting

On-site hole-cutting through steel plates, H-Beams, shaped bars, framework, shipbuilding, bridges, structures, steel reinforcements, construction materials and other machinery.


Automatic-feed Hole-cutting Procedure

- Align the pilot pin with the center punch mark of the hole to be drilled. Attach the machine to the beam with the proper safety chain and engage the magnet. Lower the drill down from the top limit switch location to the point of the pilot pin making contact with the material and engage the motor.



- Engage the clutch by pushing the handles in towards the drill and the motor will begin feeding automatically.

Automatic-feed operation



- Slow start mechanism cuts smoothly through the mill scale. Then, speed and feed rate is controlled by the sensors to achieve efficient drilling.




- After the hole is completed, the QA Series machines will quickly return and stop at the top of the stroke, ready for the next hole.




Types of hole-cutting



Slanted hole-cutting



Long hole-cutting



Edge hole-cutting

***Nitto Kohki's Atra Ace boosts productivity
in the hole drilling industry.***



Load Sensor

The dual sensing system responds to both drilling and feeding forces on the cutter for the optimum cutting condition.

Variable Automatic Feed

The feed speed is continuously monitored and updated proportionally to the load on the cutter.

Cycle Stop

After the cut has finished, a detector responds to the reduction in load and both the drill and the feed motor automatically stop.

Specifications

Model			WA-3500	WA-5000	
Power Source (Single Phase)			110-120 V AC 50/60Hz	110-120 V AC 50/60Hz	
Electric Drill	Rated Power Consumption	W	1,100	1,150	
	Rated Current	A	10.2	10.8	
	No Load Speed	rpm	950	350 / 650	
Magnet Power Consumption			W	34	75
Capacity	Hole Diameter		1-3/8" max.	2" max.	
	Depth of Cut		2" max.	3" max.	
Magnet Holding Power			lbs	1,583	2,200
Magnet Dimensions			inch	3-5/8" x 8-1/2"	4" x 8"
Weight			lbs	44	51
Accessories Included			<ul style="list-style-type: none">• UEA0835-0 pilot pin 5/16" x 1-3/8" DOC• 3 mm allen wrench• 8 mm x 10 mm combination spanner• Chip guard assembly• Motor side handle• Sample cutting fluid• Safety chain• Molded plastic carrying case• UEA0850-0 pilot pin 5/16" x 2" DOC• 3 mm allen wrench• 4 mm allen wrench• 8 mm x 10 mm combination spanner• Chip guard assembly• Motor side handle• Sample cutting fluid• Safety chain• Molded plastic carrying case		


ATRAACE quick auto
Model **QA-4000**



ATRAACE quick auto
Model **QA-5000**



ATRAACE quick auto
Model **QA-6500**



Load Detection

Side mounted LED graph displays current drill status before, during and after the drilling operation. The load monitoring LEDs also offer advanced notice of worn or damaged cutters.


Auto-return Function

Once drilling is completed and the slug is ejected from the hole, the cutting bit is quickly retracted. This quick drill motor retraction allows the user to move on to the next hole more quickly.

	QA-4000	QA-5000	QA-6500
	110-120 V AC 50/60Hz	110-120 V AC 50/60Hz	220-240 V AC 50/60Hz
	680	1,010	1,010
	6.1	9	4.5
	750	400 / 750	400/ 750
	50	75	75
	1-9/16" max.	2" max.	2-9/16" max.
	1-3/8" max.	2" max.	2" max.
	1,498	2,200	2,200
	3-1/4" x 6-13/16"	3-15/16" x 7-15/16"	3-15/16" x 7-15/16"
	41	57	57
	<ul style="list-style-type: none">• UEA0835-0 pilot pin 5/16" x 1-3/8" DOC• 3 mm allen wrench• 4 mm allen wrench• 8 mm x 10 mm combination spanner	<ul style="list-style-type: none">• UEA0835-0 pilot pin 5/16" x 1-3/8" DOC• UEA0850-0 pilot pin 5/16" x 2" DOC• 3 mm allen wrench• 4 mm allen wrench	<ul style="list-style-type: none">• 8 mm x 10 mm combination spanner• Motor side handle• Sample cutting fluid• Safety chain• Tool box


Nitto Kohki's Atra Ace boosts productivity in the hole drilling industry.

ATRA^{ACE} manual feed
Model UOJ-3500



Max. 1-3/8"

ATRA^{ACE} manual feed
Model UOJ-5500




Max. 2-3/16"

WORLD'S FIRST SMART SENSOR

ATRA^{ACE} manual feed
Model WOJ-3200

Versatility that allows quick change from annular cutters to a chuck for twist drill bits by using TB07690




Max. 1-1/4"

Slide up for twist drill
2-3/8" height adjustable housing
Slide down for annular cutter


TB07690

UOJ-5500/WOJ-3200 Load detector with "Smart-Stop Rapid Restart" technology

As the drilling load increases, the load indicator will change in color from green to orange to red. In addition, if excessive feeding force is applied, the load indicator will rapidly blink red and the rotation of the drill motor will slow down and temporarily stop. If the load is released while the load indicator is blinking red, "Smart Stop" stalls motor when overloaded, the drill motor will resume its rotation.

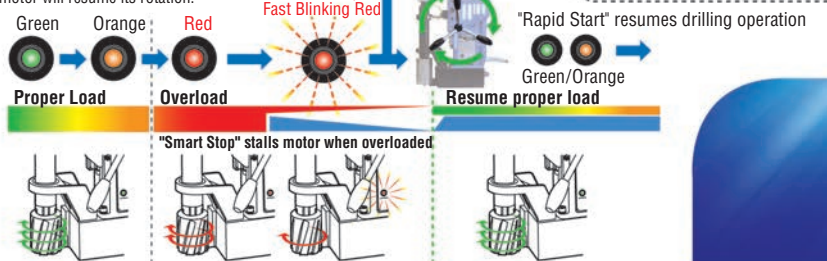

Safety Mode



Specifications

Model	UOJ-3500	UOJ-5500	WOJ-3200	
Power Source (Single Phase)	110-120 V AC 50/60Hz	110-120 V AC 50/60Hz	110-120 V AC 50/60Hz	
Electric Drill	Rated Power Consumption W	680	1,150	950
	Rated Current A	6	10.8	8.6
	No Load Speed rpm	700	350 / 650	870
Magnet Power Consumption W	32	50	38	
Capacity	Hole Diameter	1-3/8" max.	2-3/16" max.	1-1/4" max.
	Depth of Cut	2" max.	3" max.	2" max.
Twist Drill Capacity	1/2"	N/A	1/2"	
Magnet Holding Power lbs	2,023	2,249	2,024	
Magnet Dimensions inch	3-5/32" x 6-3/8"	3-3/8" x 6-11/16"	3-7/8" x 7"	
Weight lbs	31	40	23	
Accessories Included	<ul style="list-style-type: none"> • UEA0835-0 pilot pin 5/16" x 1-3/8" DOC • 3 mm allen wrench • 5 mm allen wrench • 8 mm x 10 mm combination spanner • Motor side handle • Feed handles (3 each) • Chip guard assembly • Safety chain • Molded plastic carrying case 			<ul style="list-style-type: none"> • UEA0850-0 pilot pin 5/16" x 2" DOC • 3 mm allen wrench • 5 mm allen wrench • 6 mm allen wrench • 8 mm x 10 mm combination spanner • Motor side handle • Feed handles (3 each) • Chip guard assembly • Oil tank • Hex. socket head bolt 5 x 10 mm (2 ea.) • Safety strap • Molded plastic carrying case

ATRAACE manual feed
Model **UO-3500**


Max. 1-3/8"



- Especially designed for H.S.S. cutters
- Side-lock version (UO-3500-02) available

Uses Hi-Broach
High-speed Steel
Annular Cutters


ATRAMASTER manual feed
Model **M-100D**


Max. 3/8"



- Smallest and lightest Magnetic Base Drill with 3/8" chuck
- Very easy to handle
- Superior workhorse for drilling small holes with twist drill bits

ATRAACE manual feed
Model **ARA-100A**


Max. 4"



- Super-duty Magnetic Base Drill to handle up to 4" x 3" capacity
- Morse Taper #3 for versatility
- Smart-Stop/Rapid-Restart function





	UO-3500	M-100D	ARA-100A
	110-120 V AC 50/60Hz	110-120 V AC 50/60Hz	220-240 V AC 50/60Hz
	680	390	1,800
	6	3.7	8.2
	400	1,700	110-210/330-660
	32	35	80
	1-3/8" max.	3/8" max.	4" max.
	2" max.	4" max.	3" max.
	1/2"	3/8"	1-1/4"
	2,023	772	3,820
	3-5/32" x 6-3/8"	4-1/8" dia.	4-5/16" x 8-5/8"
	31	18	66
	<ul style="list-style-type: none"> • UEA0825-0 pilot pin 5/16" x 1" DOC • 3 mm allen wrench • 5 mm allen wrench • 8 mm x 10 mm combination spanner • Motor side handle • Feed handles (3 each) • Chip guard assembly • Safety chain • Molded plastic carrying case 	<ul style="list-style-type: none"> • 2.5 mm allen wrench • 7 mm x 8 mm combination spanner • Chuck key (TP08006-0) 	<ul style="list-style-type: none"> • TA9A207-0 pilot pin 3" DOC • Side Handle • 2.5 mm allen wrench • 5 mm allen wrench • 6 mm allen wrench • 8 mm allen wrench • Drift key for Morse Taper #3 • 7 mm x 8 mm combination spanner • Safety Chain • Chip Guard

T.C.T. (Tungsten Carbide Tip) cutters
are far superior to conventional
H.S.S. or cobalt cutters

JETBROACH

One-Touch type

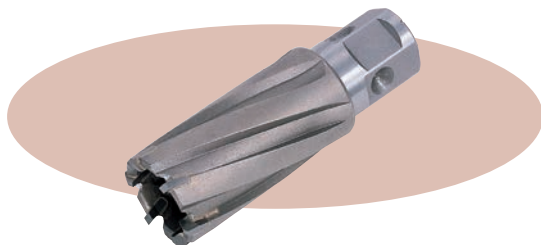

JETBROACH CUTTERS
are far better than twist drills:

- No dead point
- Peripheral cutting
- Dramatically reduce cutting resistance
- Available size:
9/16" - 4" diameter


Rationalized Hole-cutting

Genuine one-touch cutters

Nitto Kohki has developed the one-touch replacement system for Jetbroach carbide-tipped annular hole cutters. They are designed to be mounted and removed without the use of a tool. This reduces the time needed to replace cutters.


- Carbide tips for faster cutting
 - Single pass cutting, no pilot hole required
 - Annular part does all the work so small cutting resistance reduces drilling time
 - Cutting of slanted, elongated and edge holes is now possible
 - Fractional and metric cutter sizes to suit wide range of applications
 - Produces little slag and few chips for easy disposal
 - Can also be fitted to and used with previous Atra Ace models using a hexagon socket set-screw
 - Improved concentricity extends cutter life!
- One-touch system consisting of three balls inside the arbor body produces a self-centering effect during cutting to improve cutter performance and life

Self-centering effect mechanism to extend cutter life



Note:

When holding with a hexagon socket set-screw for fitting to previous Atra Ace models, be sure to tighten not to a dimple but to the flat area (arrow).



INDUSTRIAL ARBOR



COMBINATION ON HOLDERS AND CUTTERS*

Jetbroach Holder	Part #	Overall Length of Holder (mm)	Up to 35mm Thick Pilot Pin	Up to 50mm Thick Pilot Pin	Up to 75mm Thick Pilot Pin
A BHM-02035 (MT #2)	TB00390-0	163	UEA0835-0		
B BHM-03050 (MT #3)	TB00392-0	182	UEA0835-0	UEA0850-0	
C BHM-13075 (MT #3)	TB00352-0	248			TA9A207-0
D BHM-14075 (MT #4)	TB00354-0	232			TA9A207-0
E BHOR8-00050 (R-8)	TB05943-0		UEA0835-0	UEA0850-0	
F BHR8-00050 (R-8)	TB05891-0		UEA0835-0	UEA0850-0	

*All holders use side-lock shank except for E - #BHOR8-00050, which uses one-touch shank.

Standard Accessories

	A	B	C	D	E	F
Pilot Pin UEA0835-0	•	•			•	
Pilot Pin TA9A207-0			•	•		

	A	B	C	D	E	F
Hex Wrench key 6	•	•				•
Hex Wrench key 8			•	•		


FEED & SPEED

A guide to the selection of circumferential cutting speeds:

	feet/min	m/min
Stainless Steel	65 - 131	20 - 40
Mild Steel	98 - 164	30 - 50
Cast Iron	98 - 164	30 - 50
Brass	164 - 229	50 - 70
Aluminum	229 - 295	70 - 90

Test Drilling is very often the only way to determine the machinability of difficult materials.

Recommended Feed: 0.001"-0.004"/rev. (0.02~0.1 mm/rev.)

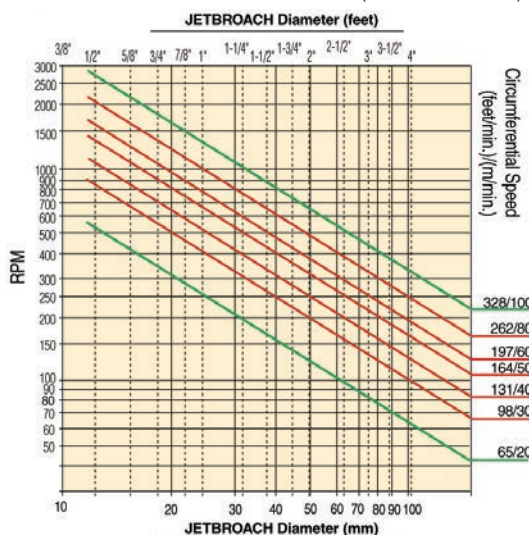


Optional Accessories

Jetbroach Cutter Coolant
(1 gal.)
UEB1001



- Nitto's ATRACool maximizes Jetbroach drilling performance and tool life.
- Economical dilution ratio of 9:1 (water:coolant)
- Also available in 55 gallon drum (part # UEB1055)


BORING ANNULAR CUTTERS **BROACH CUTTERS & BROACH HOLDERS**

FRACTIONAL - Inch size					
JETBROACH					
 <i>One-touch Side-lock Type (3/4" shank)</i>					
Diameter	Decimal	1-3/8" DOC	2" DOC	3" DOC	4" DOC
9/16"	.563	TK01160*	TK01162**	—	—
5/8"	.625	TK01161*	TK01163**	—	—
11/16"	.687	TK00517	TK00559	TK01037	—
3/4"	.750	TK00518	TK00560	TK00981	—
13/16"	.812	TK00519	TK00561	TK00982	TK01054
7/8"	.875	TK00520	TK00562	TK00983	TK01055
15/16"	.937	TK00521	TK00563	TK00984	TK01056
1"	1.000	TK00522	TK00564	TK00985	TK01057
1-1/16"	1.062	TK00523	TK00567	TK00986	TK01058
1-1/8"	1.125	TK00554	TK00568	TK00987	TK01059
1-3/16"	1.187	TK00555	TK00565	TK00988	TK01060
1-1/4"	1.250	TK00524	TK00569	TK00989	—
1-5/16"	1.312	TK00525	TK00570	TK00990	—
1-3/8"	1.375	TK00526	TK00571	TK00991	—
1-7/16"	1.437	TK00641	TK00572	TK00992	—
1-1/2"	1.500	TK00642	TK00573	TK00993	—
1-9/16"	1.562	TK00643	TK00574	TK00994	—
1-5/8"	1.625	—	TK00575	TK00995	—
1-11/16"	1.687	—	TK00576	TK00996	—
1-3/4"	1.750	—	TK00577	TK00997	—
1-13/16"	1.812	—	TK00578	TK00998	—
1-7/8"	1.875	—	TK00579	TK00999	—
1-15/16"	1.937	—	TK00580	TK01000	—
2"	2.000	—	TK00581	TK01001	—
2-1/16"	2.062	—	TK00644	TK01002	—
2-1/8"	2.125	—	TK00645	TK01094	—
2-3/16"	2.187	—	TK00646	TK01095	—
2-1/4"	2.250	—	TK00647	—	—
2-5/16"	2.312	—	TK00648	—	—
2-3/8"	2.375	—	TK00649	—	—
2-7/16"	2.437	—	TK00650	—	—
2-1/2"	2.500	—	TK00651	—	—
2-9/16"	2.562	—	TK00652	—	—
Pilot Pin		UEA0835	UEA0850	UEA0875	UEA0800

* 9/16" and 5/8" diameter cutters are 1" DOC (Not for use in QA Series)

* Exception of TK01160 & TK01161 uses UEA0625 (Not for use in QA Series)

** Exception of TK01162 & TK01163 uses UEA0650 (Not for use in QA Series)


HI-BROACH (High Speed Steel)			
 <i>One-touch Side-lock Type (3/4" shank)</i>			
Diameter	Decimal	1" DOC	2" DOC
7/16"	.437	UK00799*	UK00803*
1/2"	.500	UK00796*	UK00804*
9/16"	.562	TK00582**	TK00805†
5/8"	.625	TK00583**	TK00806†
11/16"	.687	TK00584	TK00808†
3/4"	.750	TK00585	TK00809
13/16"	.812	TK00586	TK00810
7/8"	.875	TK00587	TK00811
15/16"	.937	TK00588	TK00812
1"	1.000	TK00589	TK00813
1-1/16"	1.062	TK00590	TK00814
1-1/8"	1.125	TK00591	TK00815
1-3/16"	1.187	TK00592	TK00816
1-1/4"	1.250	TK00593	TK00817
1-5/16"	1.312	TK00594	TK00818
1-3/8"	1.375	TK00595	TK00819
Pilot Pin		UEA0825	UEA0850


Hi-Broach metric sizes
available upon request.

* UK number cutter comes with pilot pin

** Exception of TK00582 & TK00583 uses UEA0625


† Exception of TK00805, TK00806 & TK00808 uses UEA0650

METRIC - mm size			
JETBROACH			
 <i>One-touch Side-lock Type (3/4" shank)</i>			
Diameter	Decimal	1-3/8" DOC	2" DOC
17.5	0.689	TK01249	TK01282
18	0.709	TK01250	TK01283
18.5	0.728	TK01251	—
19	0.748	TK01252	TK01284
19.5	0.767	TK01253	TK01285
20	0.787	TK01254	TK01286
20.5	0.807	TK01255	TK01287
21	0.827	TK01256	TK01288
21.5	0.846	TK01257	TK01289
22	0.866	TK01258	TK01290
22.5	0.885	TK01259	TK01291
23	0.905	TK01260	TK01292
23.5	0.925	TK01261	TK01293
24	0.945	TK01262	TK01294
24.5	0.965	TK01263	TK01295
25	0.984	TK01264	TK01296
26	1.023	TK01266	TK01298
26.5	1.043	TK01267	TK01299
27	1.063	TK01268	TK01300
28	1.102	TK01269	TK01301
29	1.141	TK01270	TK01302
30	1.181	TK01271	TK01303
31	1.220	TK01272	TK01304
32	1.259	TK01273	TK01305
33	1.299	TK01274	TK01306
34	1.338	TK01275	TK01307
35	1.378	TK01276	TK01308
36	1.417	TK01277	TK01309
37	1.456	TK01278	TK01310
38	1.496	TK01279	TK01311
39	1.535	TK01280	TK01312
40	1.575	TK01281	TK01313
41	1.614	—	TK01314
42	1.654	—	TK01315
43	1.693	—	TK01316
44	1.732	—	TK01317
45	1.772	—	TK01318
46	1.811	—	TK01319
47	1.850	—	TK01320
48	1.890	—	TK01321
49	1.929	—	TK01322
50	1.969	—	TK01323
51	2.008	—	TK01324
52	2.047	—	TK01325
53	2.087	—	TK01326
54	2.126	—	TK01327
55	2.165	—	TK01328
56	2.205	—	TK01329
57	2.244	—	TK01330
58	2.283	—	TK01331
59	2.323	—	TK01332
60	2.362	—	TK01333
61	2.402	—	TK01334
62	2.441	—	TK01335
63	2.480	—	TK01336
64	2.520	—	TK01337
65	2.559	—	TK01338
Pilot Pin		UEA0835	UEA0850

JETBROACH		
 <i>Side-lock Type (1-1/4" Weldon Shank)</i>		
Diameter	Decimal	3" DOC
50	1.969	TK01433
51	2.008	TK01434
52	2.047	TK01435
53	2.087	TK01436
54	2.126	TK01437
55	2.165	TK01438
56	2.205	TK01439
57	2.244	TK01440
58	2.283	TK01441
59	2.323	TK01442
60	2.362	TK01443
61	2.402	TK01444
62	2.441	TK01445
63	2.480	TK01446
64	2.520	TK01447
65	2.559	TK01446
66	2.598	TK01449
67	2.638	TK01450
68	2.677	TK01451
69	2.717	TK01452
70	2.756	TK01453
71	2.795	TK01454
72	2.835	TK01455
73	2.874	TK01456
74	2.913	TK01457
75	2.953	TK01458
76	2.992	TK01459
77	3.031	TK01460
78	3.071	TK01461
79	3.110	TK01462
80	3.150	TK01463
81	3.189	TK01464
82	3.228	TK01465
83	3.268	TK01466
84	3.307	TK01467
85	3.346	TK01468
86	3.386	TK01469
87	3.425	TK01470
88	3.465	TK01471
89	3.504	TK01472
90	3.543	TK01473
91	3.583	TK01474
92	3.622	TK01475
93	3.661	TK01476
94	3.701	TK01477
95	3.740	TK01478
96	3.780	TK01479
97	3.819	TK01480
98	3.858	TK01481
99	3.898	TK01482
100	3.937	TK01483
Pilot Pin		TA9A207



Double-acting hydraulic system allows automatic and inching (manual mode) operation.



SELFER_{HCF}
Model HS11-1624

15.16" (385mm)
18.21" (462.5mm)

Max. Punching Diameter : 1-1/16"
Max. Punching Thickness : 5/8" *
1/4" for 304 Stainless Steel
Max. Output : 52 tons

SELFER_{HCF}
Model HS07-1624

14.29" (363mm)
16.95" (430.5mm)

Max. Punching Diameter : 15/16"
Max. Punching Thickness : 5/8"
1/4" for 304 Stainless Steel
Max. Output : 52 tons

SELFER_{HCF}
Model HS06-1322

12.72" (323mm)
16.65" (423mm)

Max. Punching Diameter : 7/8"
Max. Punching Thickness : 1/2"
1/4" for 304 Stainless Steel
Max. Output : 41 tons


* 1" and 1-1/16" punch requires the use of a split lock nut (UHA9936-0) and reduces the maximum thickness to 9/16"

Specifications


In case of mild steel maximum punching thickness must be decided based on the equation of 0.8 x punching diameter. For details see the instruction manual.

Model	HS11-1624	HS07-1624	HS06-1322
Max. Throat Depth	4-5/16"	2-3/4"	2-3/8"
Hole Making Time	Punching Time 11.8 sec. Returning Time 5.7 sec.	Punching Time 11.8 sec. Returning Time 5.7 sec.	Punching Time 7.9 sec. Returning Time 3.4 sec.
Allowable Max. Pressure	10,000 psi	10,000 psi	10,000 psi
Weight	66 lbs.	56 lbs.	45 lbs.
Accessories Included	<ul style="list-style-type: none"> Hose Kit Assembly • Hose Cord Assembly • Spanner • Spanner 12 • Sub Handle Assembly • Chip Guard Ass'y Tool Box • 22 mm Punch & Die mounted on machine • 4mm Allen Wrench • 5mm Allen Wrench 		

Optional Accessories



UHA9936-0 Split Lock Nut
for 1" and 1-1/16" Punch




TA99037-0 Lock Nut Assembly
for 25 mm Punch



Part #TW-40 Spring Balancer
for HS11/HS07



Part #TW-30 Spring Balancer
for HS06



Part #TB02142-0 Hook Clamp Assembly



Part #TB02141-0 Foot Switch Relay Assembly

HYDRAULIC PUMP for HS Type
Model HPD-05
Double-Acting


16.34" (415mm)
16.79" (426.4mm)

Specifications

Model	HPD-05
Power Source (Single Phase)	110-120V AC
Max. Output Pressure	10,000 psi
Output At No Load	1.53 qt/min
Output AT 10,000 psi	0.7 qt/min
Motor	0.4 kw 4p
Reservoir Capacity	4.26 qt
Discharge Port	Rc 3/8 (PT 3/8")
Weight	63 lbs.

230V available upon request

***Punch and return operations are fully automatic.
An emergency switch returns the punch at any time.***



SELFER
Model **HA11-1624**

17.17" (436mm)

21.5" (545.6mm)

- Max. Punching Diameter : 1-1/16"
- Max. Punching Thickness : 5/8" *
- Max. Output : 49 tons

SELFER
Model **HA07-1624**

16.46" (418mm)

21.5" (545.6mm)

- Max. Punching Diameter : 15/16"
- Max. Punching Thickness : 5/8"
- Max. Output : 49 tons

SELFER
Model **HA06-1322**

15" (381mm)

20.63" (524.1mm)

- Max. Punching Diameter : 7/8"
- Max. Punching Thickness : 1/2"
- Max. Output : 34 tons


* 1" and 1-1/16" punch requires the use of a split lock nut (UHA9936-0) and reduces the maximum thickness to 9/16"

Specifications


In case of mild steel maximum punching thickness must be decided based on the equation of $0.8 \times \text{punching diameter}$. For details see the instruction manual.

Model	HA11-1624	HA07-1624	HA06-1322
Max. Throat Depth	4-5/16"	2-3/4"	2-3/8"
Hole Making Time	Punching Time 16.5 sec. Returning Time 1 sec.	Punching Time 16.5 sec. Returning Time 1 sec.	Punching Time 10.5 sec. Returning Time 1 sec.
Allowable Max. Pressure	10,000 psi	10,000 psi	10,000 psi
Weight	78 lbs.	63 lbs.	47 lbs.
Accessories Included	<ul style="list-style-type: none"> Hose Cord Assembly • Spanner • Sub Handle Assembly • Tool Box 22 mm Punch & Die mounted on machine • 4mm Allen Wrench 		

Optional Accessories



UHA9936-0 Split Lock Nut
for 1" and 1-1/16" Punch




TA99037-0 Lock Nut Assembly
for 25 mm Punch



Part #TW-40
Spring Balancer
for HA11/HA07



Part #TW-30
Spring Balancer
for HA06



Part #TA96342-0
Hook Clamp Assembly



Part #TA94386-0
Foot Switch Assembly

HYDRAULIC PUMP for HA Type
Model **SC-05**
Single-Acting



12.76" (324mm)

14.96" (380mm)

Specifications

Model	SC-05
Power Source (Single Phase)	110-120V AC
Max. Output Pressure	10,000 psi
Output At No Load	1.28 qt/min
Output At 10,000 psi	0.59 qt/min
Motor	0.4 kw 4p
Reservoir Capacity	4.26 qt
Discharge Port	Rc 3/8 (PT 3/8")
Weight	60 lbs.

Self-contained hydraulic punch shows its power in making round or elongated holes in flat bar, angle bar or channel iron.

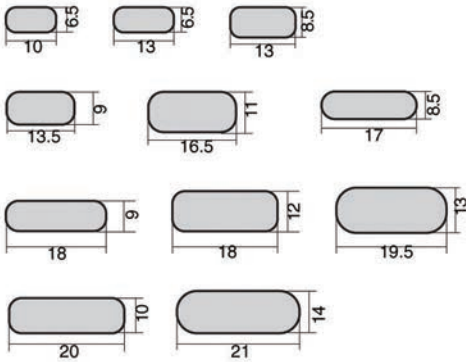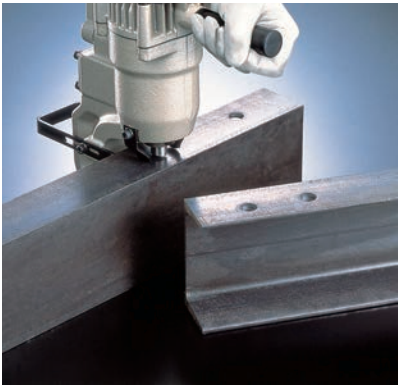

Custom shape and size punches and dies available upon request

Specifications

Model	E55-0619
Power Source (Single Phase)	110-120V AC 50/60 Hz
Rated Power Consumption	670 W
Rated Current	7.0 A
Max. Punching Diameter	13/16"
Max. Punching Thickness	1/4"
Max. Throat Depth	2-3/16"
Punching Time	2 sec.
Weight	31 lbs
Accessories Included	<ul style="list-style-type: none">• 3 mm / 4 mm / 5 mm Allen Wrench• Stand Assembly• EL Punch 18 / EL Die 18B / EL Die 18A Mounted on Machine• Spanner 10 x 12

Selection of Dies

Application	Type of Die	Plate Thickness	
		Mild Steel	Stainless Steel
For thin sheets	A	1/16" – 1/8"	Max. 1/8"
For thick sheets	B	5/32" – 1/4"	Max. 5/32"
For channel iron	C	9/32" – 5/16"	N.A.

Optional Accessories




Foot Switch Assembly
TB00799-0

Punches & Dies for SELFER Puncher



For HS and HA Series SELFER ACE			
FRACTIONAL - Inch Round Size			
Diameter	Decimal	Punch	Die
5/16"	0.313	UHP0516	UHD0516
3/8"	0.375	UHP0308	UHD0308
7/16"	0.438	UHP0716	UHD0716
1/2"	0.500	UHP0102	UHD0102
9/16"	0.563	UHP0916	UHD0916
5/8"	0.625	UHP0508	UHD0508
11/16"	0.688	UHP1116	UHD1116
3/4"	0.750	UHP0304	UHD0304
13/16"	0.813	UHP1316	UHD1316
7/8"	0.875	UHP0708	UHD0708
15/16"	0.938	UHP1516	UHD1516
**1"	1.000	UHP0101	UHD0101
**1-1/16"	1.063	UHP1716	UHD1716

**1" and 1-1/16" require part # UHA9936 split lock nut



For HS and HA Series SELFER ACE			
METRIC - mm Round Size			
Diameter	Decimal	Punch	Die
8	0.315	TK01489	TK01521
9	0.354	TK01490	TK01522
10	0.394	TK01491	TK01523
11	0.433	TK01492	TK01524
12	0.472	TK01493	TK01525
13	0.512	TK01494	TK01526
14	0.551	TK01495	TK01527
14.5	0.571	TK01496	TK01528
15	0.591	TK01497	TK01529
16	0.630	TK01498	TK01530
17	0.669	TK01499	TK01531
17.5	0.689	TK01500	TK01532
18	0.709	TK01501	TK01533
18.5	0.728	TJ08578	TJ08579
19	0.748	TK01502	TK01534
20	0.787	TK01503	TK01535
20.5	0.807	TK01504	TK01536
21	0.827	TK01505	TK01537
21.5	0.846	TK01506	TK01538
22	0.866	TK01507	TK01539
22.5	0.886	TJ09552	TJ09553
23	0.906	TK01508	TK01540
23.5	0.925	TK01509	TK01541
24	0.945	TK01510	TK01542
*25	0.984	TK01511	TK01543

*25 mm requires part # TA99037 oversized lock nut



For HS and HA Series SELFER ACE				
METRIC - mm Oblong Size				
Size	Decimal	Punch	Die	Jig
16 x 8	0.630 x 0.315	TK01512	TK01544	TK01694
18 x 9	0.709 x 0.354	TK01513	TK01545	TK01695
20 x 10	0.787 x 0.394	TK01514	TK01546	TK01696
20 x 14	0.787 x 0.551	TJ14973	TJ14974	TK00469
22 x 11	0.866 x 0.433	TK01515	TK01547	TK01697
24 x 12	0.945 x 0.472	TK01516	TK01548	TK01698
*25 x 9	0.984 x 0.354	TK01517	TK01549	TK01699
*25 x 12	0.984 x 0.472	TK01518	TK01550	TK01700
*25 x 14	0.984 x 0.551	TK01519	TK01551	TK01701
*25 x 18	0.984 x 0.709	TK01520	TK01552	TK01702

*25 mm size requires part # TA99037 oversized lock nut

Punches & Dies for HANDY SELFER

For E55-0619 HANDY SELFER					
FRACTIONAL - Inch Round Size					
Diameter	Decimal	Punch	"A" Die	"B" Die	"C" Die
1/4	0.250	E5P0104-0	E5D0104-A	E5D0104-B	—
5/16	0.313	E5P0516-0	E5D0516-A	E5D0516-B	—
3/8	0.375	E5P0308-0	E5D0308-A	E5D0308-B	E5D0308-C
7/16	0.438	E5P0716-0	E5D0716-A	E5D0716-B	E5D0716-C
1/2	0.500	E5P0102-0	E5D0102-A	E5D0102-B	E5D0102-C
9/16	0.563	E5P0916-0	E5D0916-A	E5D0916-B	E5D0916-C
5/8	0.625	E5P0508-0	E5D0508-A	E5D0508-B	E5D0508-C
11/16	0.688	E5P1116-0	E5D1116-A	E5D1116-B	—
3/4	0.750	E5P0304-0	E5D0304-A	E5D0304-B	—
13/16	0.813	E5P1316-0	E5D1316-A	E5D1316-B	—


"A" Die for 1/16" thru 1/8" mild steel
 "B" Die for 5/32" thru 1/4" mild steel
 "C" Die for 9/32" thru 5/16" mild steel/C-channel

For E55-0619 HANDY SELFER					
METRIC - mm Round Size					
Diameter	Decimal	Punch	"A" Die	"B" Die	"C" Die
6	0.236	TK01606	TK01633	TK01648	—
6.5	0.256	TK01607	TK01634	TK01649	—
8	0.315	TK01608	TK01635	TK01650	—
8.5	0.335	TK01609	TK01636	TK01651	—
10	0.394	TK01610	TK01637	TK01652	TK01663
11	0.433	TK01611	TK01638	TK01653	TK01664
12	0.472	TK01612	TK01639	TK01654	TK01665
13	0.512	TK01613	TK01640	TK01655	TK01666
14	0.551	TK01614	TK01641	TK01656	TK01667
15	0.591	TK01615	TK01642	TK01657	TK01668
16	0.630	TK01616	TK01643	TK01658	TK01669
17	0.669	TK01617	TK01644	TK01659	—
18	0.709	TK01618	TK01645	TK01660	—
18.5	0.728	TK01619	TK01646	TK01661	—
19	0.748	TK01620	TK01647	TK01662	—

"A" Die for 1/16" thru 1/8" mild steel
 "B" Die for 5/32" thru 1/4" mild steel
 "C" Die for 9/32" thru 5/16" mild steel/C-channel

For E55-0619 HANDY SELFER				
METRIC - mm Oblong Size				
Size	Decimal	Punch	"A" Die	"B" Die
10 x 6.5	0.394 x 0.256	TK01621	TK01670	TK01682
13 x 6.5	0.512 x 0.256	TK01622	TK01671	TK01683
13 x 8.5	0.512 x 0.335	TK01623	TK01672	TK01684
13.5 x 9	0.531 x 0.354	TK01624	TK01673	TK01685
15 x 10	0.591 x 0.394	TK01625	TK01674	TK01686
16.5 x 11	0.650 x 0.433	TK01626	TK01675	TK01687
17 x 8.5	0.669 x 0.335	TK01627	TK01676	TK01688
18 x 9	0.709 x 0.354	TK01628	TK01677	TK01689
18 x 12	0.709 x 0.472	TK01629	TK01678	TK01690
19.5 x 13	0.768 x 0.512	TK01630	TK01679	TK01691
20 x 10	0.787 x 0.394	TK01631	TK01680	TK01692
21 x 14	0.827 x 0.551	TK01632	TK01681	TK01693

"A" Die for 1/16" thru 1/8" mild steel
 "B" Die for 5/32" thru 1/4" mild steel



Custom shape and size punches and dies for SELFER ACE, SELFER, and HANDY SELFER available upon request.


HAND BEVELER HB-15B *Chamfering up to 15C*




Features

- Ideal for plate, pipe, and tube beveling for welding preparation
- Bevels angles 15° to 45°
- Bevels depth up to 5/8" (15 mm) at 45° angle using multiple passes
- Bevels approximately 3' to 4' per minute
- High speed cutting action minimizes material hardening

Chamfering steel plates



Chamfering I-beams



Specifications

Model	HB-15B
Power Supply	115V AC, 50/60 Hz
Rated Power Consumption	910 W
Rated Current	10.5 A
No Load Speed	3,340 RPM
Chamfering Capacity (Mild Steel)	5/8" (15 mm) Depth at 45° Angle
Chamfer Angle	15° – 45°
Power Cord	13.1 feet (4 meters)
Weight	33 lbs
Accessories Included	<ul style="list-style-type: none">• 4 mm Allen Wrench• 5 mm Allen Wrench• 6 mm Allen Wrench• Hook Spanner 25-28• Spanner 24 mm x 27 mm• 3mm T Wrench• Roller Bracket Assembly• 2 Sets of Cutting Tips, Comes with One Set Mounted (12 pieces/set)
Optional Accessories	<ul style="list-style-type: none">• TA9A728 Pipe and Tube Beveling Attachment Capacity 7-7/8" to 32" inches O.D.• TA9A093 Cutting Tips (12 pieces/set)

Chamfer angle and width

Chamfer Angle α	HB-15B Mild Steel(mm)		Chamfer	
	X	Y		
45°	15	15		
30°	9	15.5		
15°	4	15.4		

Spring Balancers

TIGON Spring Balancer Improves Work Safety & Efficiency

**Capacities ranging from 1.1 - 154.3 lbs.
(0.5 - 70 kg.)**

Model	Capacity		Stroke		Weight	
	lbs.	kg	feet	m	lbs.	kg
TW-00	1.1-3.3	0.5-1.5	1.64	0.5	0.4	0.2
TW-0	1.1-3.3	0.5-1.5	3.28	1.0	1.1	0.5
TW-3	2.2-6.6	1.0-3.0	4.27	1.3	3.1	1.4
TW-5	5.5-11.0	2.5-5.0	4.27	1.3	3.3	1.5
TW-9	9.9-19.8	4.5-9.0	4.27	1.3	7.5	3.4
TW-15	19.8-33.1	9.0-15.0	4.27	1.3	8.4	3.8
TW-22	33.1-48.5	15.0-22.0	4.92	1.5	15.9	7.2
TW-30	48.5-66.1	22.0-30.0	4.92	1.5	16.8	7.6
TW-40	66.1-88.2	30.0-40.0	4.92	1.5	21.6	9.8
TW-50	88.2-110.3	40.0-50.0	4.92	1.5	22.9	10.4
TW-60	110.3-132.3	50.0-60.0	4.92	1.5	25.6	11.6
TW-70	132.3-154.3	60.0-70.0	4.92	1.5	26.0	11.8



Hose Reel Balancers

Incorporates both balancer and hose reel

Model	Capacity		Stroke		Weight		Hose Diameter (mm)	
	lbs.	kg	feet	m	lbs.	kg	I.D.	O.D.
HW-0	1.1-3.3	0.5-1.5	4.27	1.3	3.5	1.6	6.5	10
HW-3	3.3-6.6	1.5-3.0	4.27	1.3	3.8	1.7	6.5	10
HW-5	6.6-11.0	3.0-5.0	4.27	1.3	4.0	1.8	6.5	10



Retractors

Handy knob for easy tension adjustment

Model	Capacity		Stroke		Weight	
	lbs.	kg	feet	m	lbs.	kg
RW-0	1.1-3.3	0.5-1.5	6.56	2.0	1.1	0.5
RW-3	2.2-6.6	1.0-3.0	6.56	2.0	1.5	0.7
RW-5	5.5-11.0	2.5-5.0	6.56	2.0	2.0	0.9



Model	Capacity		Stroke		Weight	
	lbs.	kg	feet	m	lbs.	kg
TW-06R	0.4-1.3	0.2-0.6	4.92	1.5	0.66	0.3
TW-1R	1.1-3.3	0.5-1.5	4.92	1.5	0.66	0.3


JET CHISEL

**Powerful scaling
with multiple needles**



Features

- Quickly and efficiently removes weld slag, rust, paint and scale from most surfaces.
- Ideal for cleaning and descaling steel, bridge-work, castings, brick, stone and many other materials.
- Heavy-duty construction for industrial and maritime applications.
- Proven superior design features with no internal spring components ensures trouble-free performance.

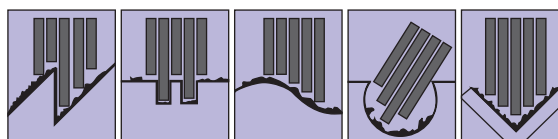


Shot Peening Effect

Reinforcement of a welded part with the shot peening effect increases strength by imparting residual stress to the surface of the workpiece through the high speed impact of the needles. Highly suitable for effective reinforcement of deteriorated welded parts.

Fully Automatic System

The only unit of its kind on the market without springs. This means no springs to break...no irregular power... and the advantage of low air consumption.

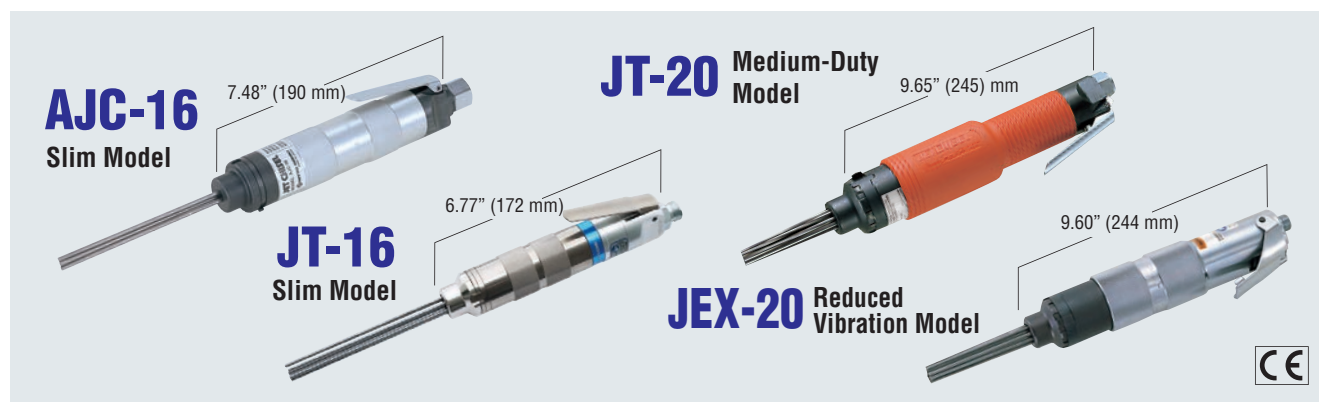

Specifications


Model	AJC-16	JT-16	JT-20	JEX-20
Air Pressure	85 PSI	85 PSI	85 PSI	85 PSI
Air Consumption	2.6 CFM	5.7 CFM	7.1 CFM	7.1 CFM
Strokes per Minute	6,000 SPM	6,000 SPM	4,000 SPM	4,000 SPM
Standard Needles with Machine	3 pieces of 3 mm x 180 mm	6 pieces of 3 mm x 180 mm	12 pieces of 3 mm x 180 mm	12 pieces of 3 mm x 180 mm
Optional Needle Size	N/A	12 pieces of 2 mm x 180 mm	29 pieces of 2 mm x 180 mm	29 pieces of 2 mm x 180 mm
Hose Size	3/8" ID	3/8" ID	3/8" ID	3/8" ID
Weight	2.2 lbs.	1.8 lbs.	5.3 lbs.	6.1 lbs
Accessories Included	<ul style="list-style-type: none"> • Threaded Adapter PT3/8" x NPT3/8" • Hose Nipple PT3/8" x 3/8" 	<ul style="list-style-type: none"> • Threaded Adapter PT3/8" x NPT3/8" • Hose Nipple PT3/8" x 3/8" 	<ul style="list-style-type: none"> • Threaded Adapter PT3/8" x NPT3/8" • Hose Nipple PT3/8" x 3/8" 	<ul style="list-style-type: none"> • Threaded Adapter PT3/8" x NPT3/8" • Hose Nipple PT3/8" x 3/8"

SCALING

NEEDLE SCALER JET CHISEL


JC-16

Lightweight Model




JEX-24

Medium-duty Model



JEX-28

Heavy-duty Model



JEX-2800A

Reduced Vibration Model



Specifications

Model	JC-16	JEX-24	JEX-28	JEX-2800A
Air Pressure	85 PSI	85 PSI	85 PSI	85 PSI
Air Consumption	5.3 CFM	9.5 CFM	12.4 CFM	15.2 CFM
Strokes per Minute	4,000 SPM	4,000 SPM	4,500 SPM	3,700 SPM
Standard Needles with Machine	29 pieces of 2 mm x 180 mm	23 pieces of 3 mm x 180 mm	28 pieces of 3 mm x 180 mm	28 pieces of 3 mm x 180 mm
Optional Needle Size	N/A	53 pieces of 2 mm x 180 mm 12 pieces of 4 mm x 180 mm	66 pieces of 2 mm x 180 mm 14 pieces of 4 mm x 180 mm	66 pieces of 2 mm x 180 mm 14 pieces of 4 mm x 180 mm
Hose Size	3/8" I.D.	3/8" I.D.	3/8" I.D.	3/8" I.D.
Weight	3.1 lbs.	6.1 lbs.	7.7 lbs.	6.8 lbs.
Accessories Included	<ul style="list-style-type: none"> Threaded Adapter PT3/8" x NPT3/8" Hose Nipple PT3/8" x 3/8". 	<ul style="list-style-type: none"> Threaded Adapter PT3/8" x NPT3/8" Hose Nipple PT3/8" x 3/8". 6mm Allen Wrench 	<ul style="list-style-type: none"> Threaded Adapter PT3/8" x NPT3/8" Hose Nipple PT3/8" x 3/8". TP01462 Needle Supporter 4mm 14 pieces of 4mm x 180mm Needles 6mm Allen Wrench 	<ul style="list-style-type: none"> Threaded Adapter PT3/8" x NPT3/8" Hose Nipple PT3/8" x 3/8". TP01462 Needle Supporter 4mm 14 pieces of 4mm x 180mm Needles

Electric Needle Scaler

EJC-32A



Accessories Included


- 15 pieces of 3 mm x 180 mm Needles
- 6mm Allen Wrench

- Overload protection
- Powerful 300 watt double insulated motor
- Extended length, slim barrel design
- Adjustable front handle for operator comfort and convenience

Specifications

Model	EJC-32A	
Power Supply	115 V AC, 50/60 Hz	230 V AC, 50/60 Hz
Rated Power Consumption	300 watts	300 watts
Rated Current	2.8 A	1.4 A
Rated Duty Cycle	30 minutes	
Strokes per Minute	3,000 SPM	
Standard Needles with Machine	15 pieces of 3 mm x 180 mm	
Optional Needle Size	32 pieces of 2 mm x 180 mm	
Power Cord Length	6-1/2 feet (5 meters)	
Weight	9.9 lbs. (4.5 kg)	

Optional Needles

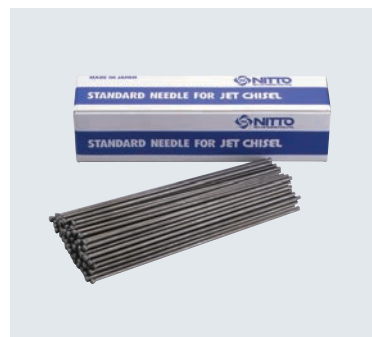

PN	Description
TB11053	Needle 2 mm x 150 mm (100 pcs./set)
TB11054	Needle 2 mm x 180 mm (100 pcs./set)
TB11055	Needle 3 mm x 180 mm (100 pcs./set)
TB11056	Needle 4 mm x 180 mm (50 pcs./set)

Premium Nitto Kohki needles out-perform competitors' needles ensuring optimal performance and trouble-free operation.

Anti-sparking beryllium copper and stainless steel needles available upon request. Consult factory before ordering.

PN	Description	Model
TP00338	Needle Supporter 2 mm	JT-20, JEX-20
TP00337	Needle Supporter 3 mm	
TQ05210	Needle Supporter 2 mm	AJC-16
TQ04554	Needle Supporter 3 mm	
TP00290	Needle Supporter 2 mm	JC-16
TP02244	Needle Supporter 2 mm	
TP02245	Needle Supporter 3 mm	JEX-24
TP14992	Needle Supporter 4 mm	
TP01499	Needle Supporter 2 mm	JEX-28, JEX-2800A
TP01461	Needle Supporter 3 mm	
TP01462	Needle Supporter 4 mm	EJC-32A
TP16475	Needle Supporter 2 mm	
TP16301	Needle Supporter 3 mm	


SUPER KELEN

Industrial and shipboard pneumatic scalers



Features

- Quickly and efficiently removes rust, scale, paint, tar and concrete from most surfaces
- Ideal for industrial, maritime and shipboard cleaning and descaling operations
- Idle protection system, tool will not activate unless contacting work surface
- S-1000 – over 4-1/2' in length for extended reach applications and operator convenience
- Tool-less chisel installation and removal

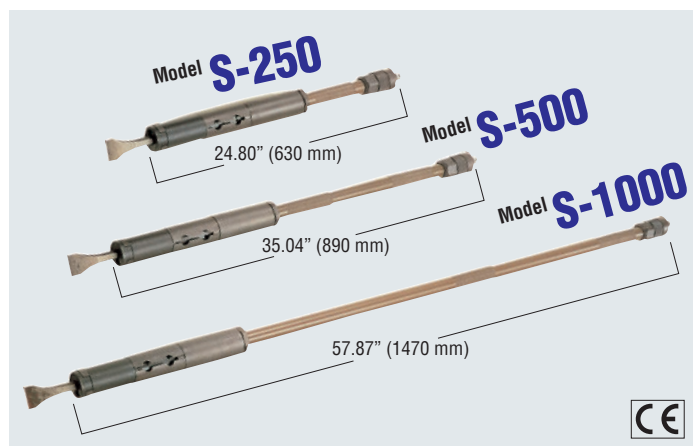


Specifications

Model	S-250	S-500	S-1000
Air Pressure	85 PSI	85 PSI	85 PSI
Air Consumption	9.5 CFM	9.5 CFM	9.5 CFM
Strokes per Minute	2,500 SPM	2,500 SPM	2,500 SPM
Shank Size	1/2" Square	1/2" Square	1/2" Square
Hose Size	3/8" ID	3/8" ID	3/8" ID
Weight	9.0 lbs.	10.4 lbs	13.4 lbs.

Accessories Included	<ul style="list-style-type: none"> • Scraper #2005 • Threaded Adapter M16 x NPT3/8" 	<ul style="list-style-type: none"> • Scraper #2005 • Threaded Adapter M16 x NPT3/8" 	<ul style="list-style-type: none"> • Scraper #2005 • Threaded Adapter M16 x NPT3/8"
----------------------	---	---	---

Optional Chisels

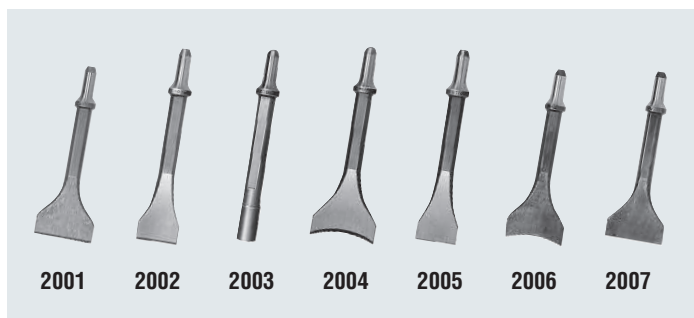

PN	Description	Qty
TP03645	2001 Scraper 2-3/8" (60 mm)	1 pc.
TP03646	2002 Scraper 1-1/2" (38 mm)	1 pc.
TP03647	2003 Blank Chisel	1 pc.
TP04010	2004 Concave Scraper 2-3/8" (60 mm)	1 pc.
TP04552	2005 Bend Scraper 1-1/2" (38 mm)	1 pc.
TP04553	2006 Concave Bend Scraper 2-3/8" (60 mm)	1 pc.
TP04554	2007 Bend Scraper 2-3/8" (60 mm)	1 pc.

AIR CHIPPER

Removes weld splatter quickly and easily



Features

- Ideal tool for quickly and efficiently removing weld splatter, rust and other debris from most surfaces
- Compact, heavy-duty construction for tough industrial applications
- Easy one-touch chisel installation and removal – NO tools required
- Idle protection system, tool will not activate unless contacting work surface, “ACH-16” only

ACH-16



CH-24



Specifications

Model	ACH-16	CH-24
Air Pressure	85 PSI	85 PSI
Air Consumption	5.3 CFM	7.1 CFM
Strokes per Minute	6,000 SPM	4,000 SPM
Shank Size	27/64" (10.5 mm) Round	1/2" Square
Hose Size	3/8" ID	3/8" ID
Weight	2.2 lbs.	3.7 lbs.
Accessories Included	<ul style="list-style-type: none"> • TQ03431 - Flat Chisel • Hose Nipple PT3/8" x 3/8" • Threaded Adapter PT3/8" x NPT3/8" 	
	<ul style="list-style-type: none"> • TP15166 - Curved Flat Chisel • Hose Nipple PT3/8" x 3/8" • Threaded Adapter PT3/8" x NPT3/8" 	

Optional Chisels



ACH-16 Chisels

PN	Description	Qty
TQ03431	Flat Chisel 3/4" x 4-3/4" (20 mm x 120 mm)	1 pc.
TQ03453	Curved Flat Chisel 3/4" x 4-3/4" (20 mm x 120 mm)	1 pc.
TQ03549	Flat Chisel 7/16" x 4-3/4" (11 mm x 120 mm)	1 pc.
TQ03452	Flat Chisel 3/4" x 7-1/16" (20 mm x 180 mm)	1 pc.

CH-24 Chisels

PN	Description	Qty
TP15234	Straight Flat Chisel 1/2" x 6-1/2" (12.7 mm x 165 mm)	1 pc.
TP15233	Flat Chisel 1" x 6-1/8" (25 mm x 155 mm)	1 pc.
TP15166	Curved Flat Chisel 1" x 6-1/8" (25 mm x 155 mm)	1 pc.

MYTON

Heavy-duty grinders for tough applications




Features

- Ideal for industrial and production grinding applications
- Variable Speed Control
- Side exhaust with noise reduction system
- Locking throttle lever helps prevent accidental start-up
- Great power/weight ratio
- Insulated handle for operator convenience and comfort
- Push button spindle lock for changing wheels (MYG-40, MYG-50, MYG-70)

MYG-25 Depressed center wheel 2-1/4"



MYG-40 Depressed center wheel 4"

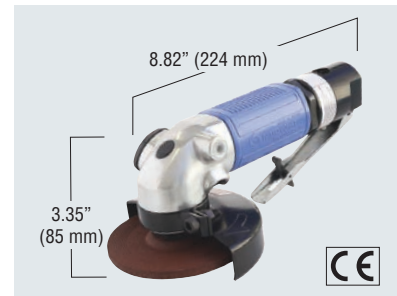

MG-40 Depressed center wheel 4"



MYG-50 Depressed center wheel 5"



MYG-70 Depressed center wheel 7"



Specifications

Model	MYG-25	MYG-40	MG-40	MYG-50	MYG-70
Air Pressure	85 PSI	85 PSI	85 PSI	85 PSI	85 PSI
Air Consumption (No Load)	14.8 CFM	17.7 CFM	17.7 CFM	26.5 CFM	24.7 CFM
Air Consumption (Load)*		24.4 CFM	-	38.8 CFM	33.5 CFM
Free Speed	19,000 RPM	13,000 RPM	13,000 RPM	11,000 RPM	7,600 RPM
Grinding Wheel Diameter	2-1/4" max.	4" max.	4" max.	5" max.	7" max.
Spindle OD Size	3/8"	5/8"	5/8"	7/8"	7/8"
Horsepower	0.28 HP	0.82 HP	0.82 HP	1.34 HP	1.34 HP
Hose Size	1/4" ID	3/8" ID	3/8" ID	3/8" ID	3/8" ID
Weight	1.3 lbs.	3.3 lbs.	3.5 lbs.	5.5 lbs.(with handle)	5.3 lbs.(with handle)
Accessories Included	<ul style="list-style-type: none"> • Threaded Adapter PT1/4" x NPT1/4" • 5 mm Allen Wrench • 19 mm Spanner • 80 grit Grinding Disc 	<ul style="list-style-type: none"> • Threaded Adapter PT3/8" x NPT3/8" • 5 mm Allen Wrench • 6 mm Allen Wrench 	<ul style="list-style-type: none"> • Threaded Adapter PT3/8" x NPT3/8" • 5 mm Allen Wrench • 6 mm Allen Wrench 	<ul style="list-style-type: none"> • Threaded Adapter PT3/8" x NPT3/8" • 4 & 6 mm Allen Wrenches • Spanner Wrench • Side Handle Assembly • Wheel Guard Assembly 	<ul style="list-style-type: none"> • Threaded Adapter PT3/8" x NPT3/8" • 6 mm Allen Wrench • 10 mm Allen Wrench • Side Handle Assembly • Wheel Guard Assembly

* Governed models

Available Side Handles: MYG-40 (#TB08265), MG-40 (#TQ01051), MYG-50 (#TB08265 or #TB09680), MYG-70 (#TB08265 or #TB09680)

MYTON

Angle Sanders



Features

- Ideal for sanding and/or polishing on metal, aluminum, wood, plastic and many other materials
- Variable Speed Control
- Side exhaust with noise reduction system
- Locking throttle lever helps prevent accidental start-up
- Compact and lightweight design for working in confined spaces
- Great power/weight ratio
- Insulated handle for operator comfort and convenience

MYS-20 Abrasive disc 1", 1-1/2" & 2"



MYS-40 Abrasive disc 4"



Specifications

Model	MYS-20	MYS-40
Air Pressure	85 PSI	85 PSI
Air Consumption (No load)	14.9 CFM	15.9 CFM
Free Speed	19,000 RPM	13,700 RPM
Sanding Disc Diameter	1", 1-1/2" or 2"	4" max.
Chuck Size	1/4"	N/A
Horsepower	0.28 HP	0.38 HP
Hose Size	1/4" ID	3/8" ID
Weight	1.3 lbs.	2.4 lbs.

Accessories Included

- Threaded Adapter PT1/4" x NPT1/4"
- Two pieces of 14 mm Spanners

- Threaded Adapter PT1/4" x NPT1/4"
- 5 mm Allen Wrench
- 6 mm Allen Wrench
- Wheel Guard Assembly

AIR SONIC



Features

- Ideal for most deburring, finishing and grinding applications
- Precision machined with heavy-duty spindle (L-25B) and support bearings (L-35C)
- Rear exhaust with noise reduction system
- Suitable for industrial and production applications
- Locking throttle lever helps prevent accidental start-up
- Accepts most stone-type and rotary carbide burrs with 1/4" shanks

L-25B For all grinding, deburring and finishing jobs



L-35C Ideal for rotary carbide burrs



Specifications

Model	L-25B	L-35C
Air Pressure	85 PSI	85 PSI
Air Consumption	14.1 CFM	12.4 CFM
Free Speed	27,000 RPM	37,500 RPM
Chuck Size	1/4" (6mm model available)	1/4" (6mm model available)
Hose Size	1/4"	1/4"
Weight (without hose)	1.3 lbs.	1.0 lbs.

Accessories Included	<ul style="list-style-type: none">• 1/8" Chuck Sleeve• Sample Grinding Stone• Spanner Wrench (14 mm)	<ul style="list-style-type: none">• Air Hose• Chuck Pin	<ul style="list-style-type: none">• 1/8" Chuck Sleeve• Sample Grinding Stone• Spanner Wrench (14 mm)	<ul style="list-style-type: none">• Air Hose
Optional Accessory	<ul style="list-style-type: none">• 3/16" Chuck Sleeve		<ul style="list-style-type: none">• 3/16" Chuck Sleeve	

* Stone type bits: Must be safety approved to operate at or above 37,500 RPM

AL-55A High Speed Rotation 56,500 RPM**Features**

- Smooth high speed rotation and low vibration enables precision grinding
- Step-less speed change from 0 to 56,500 RPM meets a wide range of grinding applications
- Compact and light weight for comfortable operation over long periods of time
- Triangular grip fits operator's hand. Special plastic grip prevents cold hands and absorbs vibration
- Rear exhaust system



**Specifications**

Model	AL-55A
Air Pressure	85 PSI
Air Consumption	6.0 CFM
Free Speed	56,500 RPM
Chuck Size	1/8" (3mm model available)
Hose Size	1/4"
Weight (without hose)	0.55 lbs.

Accessories Included

- Sample Grinding Stone
- Spanner Wrench 7mm x 9mm
- Spindle Lock Pin

* Stone type bits: Must be safety approved to operate at or above 56,500 RPM

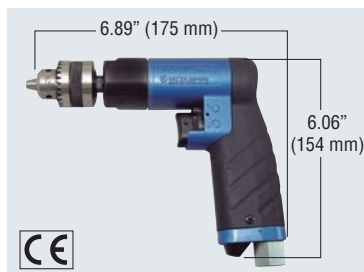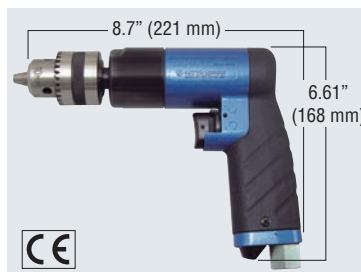AIR DRILL The power and performance you need to drill deeper and faster**ADR-65****ADR-100****Specifications**

Model	ADR-65	ADR-100
Air Pressure	85 PSI	85 PSI
Air Consumption (no load)	19.5 CFM	23.7 CFM
Free Speed	2,900 RPM	2,000 RPM
Chuck Size	1/4" (6.5 mm) max.	3/8" (10 mm) max.
Hose Size	3/8"	3/8"
Weight (without hose)	1.76 lbs.	2.42 lbs.

Accessories Included


- 1/4" (65 mm) Drill Chuck
- Chuck Key
- Threaded Adapter PT3/8" x NPT3/8"
- 3/8" (10 mm) Drill Chuck
- Chuck Key
- Threaded Adapter PT3/8" x NPT3/8"

Features

- Ultra high power to weight ratio
- Ergonomically designed to reduce operator fatigue
- Variable speed control
- Reversible
- Designed for industrial and production applications

Reversible

Change rotation direction by turning the valve as indicated.

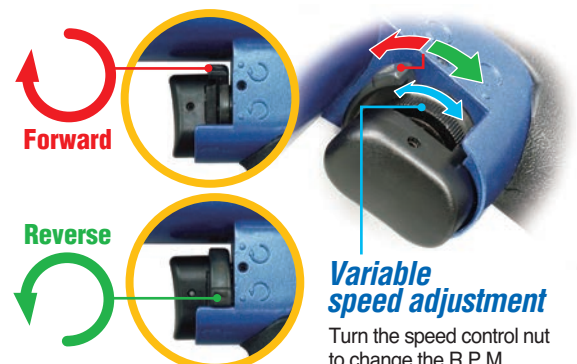

BELTON

Rear exhaust system




Ideal for sanding and grinding in narrow spaces, recessed areas and on curved surfaces


Features

- Lightweight materials for reduced user fatigue
- High-performance motor improves work output
- Throttle safety lever to prevent accidental start-ups
- Directable rear exhaust system
- 360° guard rotation to suit most applications
- Offset bracket assembly for sanding contoured surfaces
- Adjustable speed control
- Locking arm for quick belt changes

B-10CL




B-20CL




The Idle Pulley for B-20CL is supported on one side only.

B-20CL-A



B-20CL-A sanding arm tip – cradled idle pulley for confined spaces

B-30CL



Specifications

Model	B-10CL	B-20CL/B-20CL-A	B-30CL
Air Pressure	85 PSI	85 PSI	85 PSI
Air Consumption	14.2 CFM	17.0 CFM	29.1 CFM
Motor Free Speed	17,000 RPM	18,000 RPM	15,000 RPM
Belt Speed	3,470 FPM	9,086 FPM	7,577 FPM
Belt Size	3/8" x 13" (10 mm x 330 mm)	3/4" x 20-1/2" (20 mm x 520 mm)	1-3/16" x 21-1/4" (30 mm x 540 mm)
Hose Size	1/4"	1/4"	1/4"
Weight (without hose)	2.7 lbs.	2.9 lbs.	5.3 lbs.
Vibration Levels m/s ² (ISO20463)	1.21	1.32	0.56 at Grip 1.88 at Side Handle

Accessories Included

- Assortment of Sample Belts: 1 each of #60 mounted on tool plus 1 each of #60, #80, #100 and #120
- Threaded Adapter PT1/4" x NPT1/4"
- 2 mm Allen Wrench
- 4 mm Allen Wrench

- Assortment of Sample Belts: 1 each of #60 mounted on tool plus 1 each of #60, #80, #100 and #120
- Threaded Adapter PT1/4" x NPT1/4"
- 2.5 mm Allen Wrench
- Convex Shoe
- Silencer Sub Assembly

- Assortment of Sample Belts: 1 each of #60 mounted on tool plus 1 each of #60, #80, #100 and #120
- Threaded Adapter PT1/4" x NPT1/4"
- 5 mm Allen Wrench
- Side Handle Assembly
- Silencer Sub Assembly

Optional Parts

No.	PN	Description
1	TB09997	Offset Bracket 10 Ass'y for B-10CL
2	TB10192	Offset Bracket 20 Ass'y for B-20CL
3	TB08150	Offset Bracket 30 Ass'y for B-30CL
4	TB09938	Finger Pad Ass'y for B-20CL
5	TB09996	Bracket 6 Ass'y for B-10CL
6	TP14770	Shoe 6 for B-10CL
7	TB10160	Idle Pulley Bracket A Ass'y for B-20CL
8	TB10191	Convex Shoe for B-20CL



* for Abrasive belt width 6mm

Sanding Belts for BELTON Sanders

B-10CL / BB-10B

3/8" x 13" or 10 mm x 330 mm Belt

Part #	Belt Grit	Qty
UP10040	#40	20 pcs./set
UP10060	#60	20 pcs./set
UP10080	#80	20 pcs./set
UP10100	#100	20 pcs./set
UP10120	#120	20 pcs./set
UP10150	#150	20 pcs./set
UP10180	#180	20 pcs./set

B-20CL / B-20CL-A

3/4" x 20-1/2" or 20 mm x 520 mm Belt

Part #	Belt Grit	Qty
UP20040	#40	20 pcs./set
UP20060	#60	20 pcs./set
UP20080	#80	20 pcs./set
UP20100	#100	20 pcs./set
UP20120	#120	20 pcs./set
UP20150	#150	20 pcs./set


B-30CL

1-3/16" x 21" or 30 mm x 540 mm Belt

Part #	Belt Grit	Qty
UP30040	#40	20 pcs./set
UP30060	#60	20 pcs./set
UP30080	#80	20 pcs./set
UP30100	#100	20 pcs./set
UP30120	#120	20 pcs./set

BABY BELTON**Features**




- Compact and lightweight, yet powerful
- Reversible rotation direction
- Ergonomically designed for left or right hand operator convenience

BB-10B**Specifications**

Model	BB-10B
Air Pressure	85 PSI
Air Consumption	8.8 CFM
Motor Free Speed	16,000 RPM
Belt Speed	3,800 FPM
Belt Size	3/8" x 13" (10 mm x 330 mm)
Hose Size	1/4"
Weight (without hose)	1.3 lbs.

Accessories Included

- Assortment of Sample Belts, 1 Each of #100, #120, #180, and #240 grit
- 1.5 mm Allen Wrench

Ideal for deburring, chamfering, bead grinding, and polishing applications**Lever position can be changed for right or left hand operator convenience.**

For right-handed user



For left-handed user

Belt rotation direction can be changed.**Forward****Reverse**

ELECTRIC Beveling Tool**MINI BEVELER****EMB-0307B**  Double insulation**Accessories Included**

- 4 mm Allen Wrench
- Straight Cutting Tip
- (2) Hex. Nut M8
- (2) Hex. Socket Set Screws 8 mm x 25 mm
- (3) Pan Head Screws 5 mm x 10 mm
- Torx 15 (T-15) Spanner Wrench
- Chip Collector Box Assembly
- Spare Carbon Brush Assembly (1 Set)

PNEUMATIC Beveling Tool**MINI BEVELER**
AMB-0307**Accessories Included**

- Threaded Adapter PT3/8" x NPT 3/8"
- 3 mm Allen Wrench
- 4 mm Allen Wrench
- Straight Cutting Tip
- (2) Hex. Nut M8
- (2) Hex. Socket Set Screw 8 mm x 25 mm
- Torx 15 (T-15) Spanner Wrench

Features

- Lightweight design for portable edge beveling applications
- Ideal for beveling plate, outer pipe, tube and other profiles
- Designed to bevel stainless steel and carbon steel
- Adjustable to bevel angle from 15° to 45°
- Uses an indexable carbide insert
- Bevel depth up to 9/32" at 45°
- Outer edge pipe beveling > 12" (300 mm) minimum diameter
- Built-in chip collection box (**EMB-0307B**)
- Operates on single phase 230V (**EMB-0307B**)
- Powerful 1-1/2 horsepower double insulated motor (**EMB-0307B**)
- Quick release base allows easy access to cutting tip (**EMB-0307B**).

Specifications - EMB-0307B

Power Supply	220 V - 240 V A/C, 50/60 Hz
Rated Power Consumption	1010 W
Rated Current	4.6 A
Rated Duty Cycle	Continuous
Capacity (Mild Steel)	Up to 5/16" (7 mm) Bevel or 1/16" (2mm), 1/8" (3 mm), 5/32" (4 mm) Radius
Capacity (Stainless Steel)	Up to 1/8" (3mm) Bevel or 1/16" (2 mm), 1/8" (3 mm), 5/32" (4 mm) Radius
Bevel Angle	15 - 45 Degrees
Power Cord Length	13.1 Feet (4 Meters)
Weight	8.6 lbs. (3.9 kg)

Specifications - AMB-0307

Air Pressure	85 PSI
Air Consumption	31.8 CFM
Capacity (Stainless Steel)	Up to 5/16" (7 mm) Bevel or 1/16" (2mm), 1/8" (3 mm), 5/32" (4 mm) Radius
Capacity (Mild Steel)	Up to 1/8" (3mm) Bevel or 1/16" (2 mm), 1/8" (3 mm), 5/32" (4 mm) Radius
Bevel Angle	15 - 45 Degrees
Weight	6.4 lbs. (2.9 kg)

Available Cutting Tips for EMB-0307B and AMB-0307

Part #	Description
TV7A019	Straight Tip (2 pcs./set)
TV7A020	1/16" (2 mm) Radius Tip (2 pcs./set)
TV7A021	1/8" (3 mm) Radius Tip (2 pcs./set)
TV7A022	5/32" (4 mm) Radius Tip (2 pcs./set)

Bevel angle, width and radius

Angle α	EMB-0307B						AMB-0307					
	Stainless Steel(mm)			Mild Steel(mm)			Stainless Steel(mm)			Mild Steel(mm)		
	A	B	C	A	B	C	A	B	C	A	B	C
45°	3	3	4.2	7	7	9.9	3	3	4.2	7	7	9.9
30°	2.2	3.8	4.4	3.8	6.6	7.6	2.2	3.8	4.4	4	7	8.1
15°	1	3.8	3.9	1.5	5.6	5.8	1	3.8	3.9	2.2	8	8.3

Pneumatic Radial Chamfering Tool

CIRCUIT BEVELER

CB-01



Accessories Included

- Indexable Insert: 2 pcs. (Installed)
- Indexable Insert Set Screw: 2 pcs. (Installed)
- Indexable Insert Set Screw: 2 pcs. (Extra Supply)
- 2 mm Allen Wrench
- Torx 6 (T- 6F) Wrench for Insert Set Screw
- Threaded Adapter PT 1/4" x NPT 1/4"

Optional Accessories

- TB09140: Guide Plate 78 Assembly
- TB09143: Plate Assembly for Straight Edge Use (Must use with TB09140 Guide Plate 78 Assembly)

Available Cutting Tips CB-01

Part #	Description
TV7A030	Cutting Tip (2 pcs./set) for Mild Steel (1 mm capacity)
TV7A031	Cutting Tip (2 pcs./set) for Stainless Steel (0.5 mm capacity)

Features

- Lightweight and compact for beveling and chamfering applications
- Uniquely designed to chamfer circular, elliptical and straight line profiles
- Chamfers exterior and/or interior edges
- Chamfer widths up to .04" (1 mm) for CB-01/5/64" (2 mm) for CB-02 at 45°
- Optional attachment PN#TB02437 available for chamfering and/or beveling thin materials (CB-02)
- Uses indexable carbide insert

Specifications CB-01

Air Pressure	85 PSI
Air Consumption	5.3 CFM
No Load Speed	28,000 RPM
Chamfering Capacity (Mild Steel)	Up to .039" (1 mm) Chamfer
Chamfering Capacity (Stainless Steel)	Up to .020" (0.5 mm) Chamfer
Chamfer Angle	45
Minimum Plate Thickness	.059" (1.5 mm) Maximum chamfer capacity is reduced to 0.5 mm when plate thickness is 1.5 mm
Minimum Radius	.118" (3 mm Radius)
Minimum Hole Diameter	.268" (6.8 mm) Diameter Hole
Weight	1.1 lbs. (0.5 kg)

Specifications CB-02

Air Pressure	85 PSI
Air Consumption	14.1 CFM
Chamfering Capacity (Mild Steel)	Up to 5/64" (2 mm) Chamfer or 1/16" (2 mm) Radius
Chamfer Angle	45°
Weight	4.0 lbs. (1.8 kg)

Pneumatic Radial Chamfering Tool

CIRCUIT BEVELER

CB-02



Accessories Included

- Threaded adapter PT1/4" x NPT1/4"
- Straight Cutting Tip
- Hook Spanner
- Cutting Depth Adjustment Gauge
- Torx 9 (T-9) Spanner Wrench
- Protective Cap

Available Cutting Tips CB-02

Part #	Description
TV7A010	Straight Tip (2 pcs./set)
TV7A011	1/16" (2 mm) Radius Tip (2 pcs./set)

Chamfer angle, width and radius

Model	Chamfer Angle α	Mild Steel (mm)		Chamfer
		X	Y	
CB-01	45°	1	1	
CB-02	45°	2	2	
		Stainless Steel (mm)		
		X	Y	
CB-01	45°	0.5	0.5	

Model	CB-02	
Material	Mild Steel	
Radius(mm)	2	

Chamfering range of operation

Model	Min. Diameter	Min. Radius	Min. Depth
CB-02	Min. Diameter	Min. Radius	Min. Depth

SUPER HAND Fast, efficient filing, sanding and deburring tools**SH-100A****Features**

- Eliminates time consuming manual hand-filing operations
- Ideal for industrial and production filing applications on steel, aluminum, brass, wood and other materials
- Unique and compact design delivers reduced vibration performance while reducing operator fatigue
- Interchangeable files • Rear exhaust system

ASH-900

Weight reduced by half for comfortable operation over long periods of time (compared to SH-100A)

SF-10 Rat Tail File**SF-11 Triangular Taper File****SF-12 Half Round File****SF-13 Flat Bastard File****Specifications**

Model	SH-100A	ASH-900
Air Pressure	85 PSI	85 PSI
Air Consumption (No load)	8.5 CFM	7.1 CFM
Stroke Speed	3,700 SPM	6,300 SPM
Stroke Length	9 mm	9 mm
File Shank Size	6.3 mm	5.0 mm
Weight	2.4 lbs.	1.1 lbs.

Accessories Included

- Threaded Adapter PT1/4" x NPT1/4"
- 3 mm Allen Wrench
- SF-10 Rat Tail File
- SF-11 Triangular Taper File
- SF-12 Half Round File
- SF-13 Flat Bastard File

- Threaded Adapter PT1/4" x NPT1/4"
- 2.5 mm Allen Wrench
- SF-10 Rat Tail File
- SF-11 Triangular Taper File
- SF-12 Half Round File
- SF-13 Flat Bastard File


Optional Accessories

For Super Hand SH-100A, ASH-800 & ASH-900

PN	Description
TB11095	SF-10 Rat Tail File (5 pcs./set)
TB11096	SF-11 Triangular Taper File (5 pcs./set)
TB11097	SF-12 Half Rounded File (5 pcs./set)
TB11098	SF-13 Flat Bastard File (5 pcs./set)
TA91752	Rubber Pad Ass'y for SH-100A
TA94625	Chuck Assembly for SH-100A
TB04319	Sanding Pad Ass'y for ASH-800/ASH-900

TA94625

Chuck Ass'y for SH-100A (use with TA91752)

**TA91752**


Rubber Pad Ass'y for SH-100A

**TB04319**

Sanding Pad Ass'y for ASH-800/ASH-900

**SUPER HAND LIGHT**

Lightweight, ultra-low vibration filer for aluminum die cast and machined parts filing

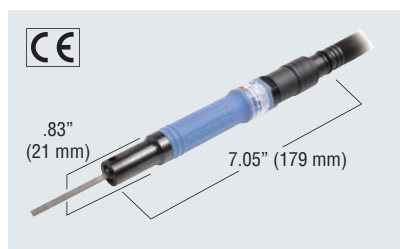SHL-40**LF-10 Rat Tail File****LF-11 Triangular Taper File****LF-12 Half Round File****LF-13 Flat File****Specifications**

Model	SHL-40
Air Pressure	85 PSI
Air Consumption (No load)	2.5 CFM
Stroke Speed	9,000 SPM
Stroke Length	4 mm
File Shank Size	3 mm
Weight	0.88 lbs. (0.4 kg)

Accessories Included


- LF-13 Flat File
- 2 mm Allen Wrench
- Threaded Adapter PT 1/4" x NPT 1/4"

Optional Accessories


PN	Description
TB11092	LF-10 Rat Tail File (3 pcs./set)
TB11094	LF-11 Triangular Taper File (3 pcs./set)
TB11093	LF-12 Half Round File (3 pcs./set)
TB11091	LF-13 Flat File (3 pcs./set)

MICRO AIR HAND

Lightweight, ultra-low vibration filer for polishing and lapping operations

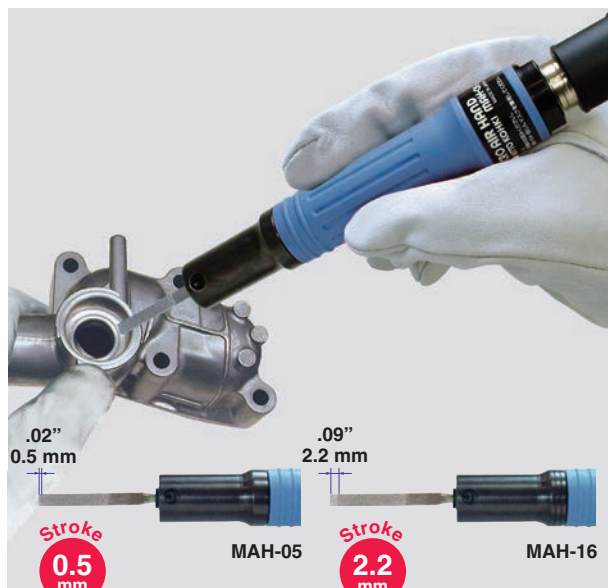

Diamond files (5pcs/set)

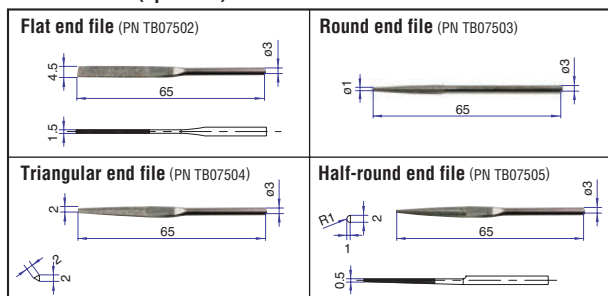


MAH-05/MAH-16



Specifications

Model	MAH-05	MAH-16
Air Pressure	85 PSI	85 PSI
Air Consumption (No load)	2.5 CFM	2.5 CFM
Stroke Speed	22,000 SPM	11,000 SPM
Stroke Length	0.5 mm	2.2 mm
File Shank Size	3 mm	3 mm
Weight	0.8 lbs.	0.8 lbs.

Accessories Included	<ul style="list-style-type: none"> • Threaded Adapter PT1/4"x NPT1/4" • 2 mm Allen Wrench • Flat End File • Round End File
-----------------------------	--



SUPER SAW

SSW-110

Special double-piston system provides low vibration while improving cutting speed!



Optional Accessories



Part #	Description
TV7A005	32 TPI for Sheet Metal, Ferrous Metal (5 blades/set)
TV7A006	24 TPI for Ferrous Metal, Non-Ferrous Metal (5 blades/set)
TV7A007	18 TPI for Wood, Plastic, Non-Ferrous Metal (5 blades/set)
TV7A008	14 TPI for Wood, Plastic (5 blades/set)

Features

- Ideal for sawing and trimming operations on sheet metal, aluminum, plastic and other materials
- Suitable for automotive, fabrication, HVAC, electrical and woodworking applications
- Ultra lightweight construction with low vibration performance
- Optimized blade stroke for maximum cutting performance
- Powerful dual piston construction
- Locking throttle lever helps prevent accidental start-up

Specifications

Model	SSW-110
Air Pressure	85 PSI
Air Consumption (No load)	10.2 CFM
Stroke Speed	7,000 SPM
Stroke Length	11 mm (7/16")
Weight	1.37 lbs.

Accessories Included	<ul style="list-style-type: none"> • Threaded Adapter PT1/4" x NPT1/4" • 3 mm Allen Wrench • (2) Sample 32 TPI Saw Blades
-----------------------------	--

FREE SANDER

Super lightweight,
low-vibration design



Features

- Ideal for sanding and surface finishing on wood, metal, plastic and other materials
- Lightweight design with minimal vibration
- High output and low air consumption motors produce high speed orbits for swirl-free finishes
- Oil free design
- Suitable for industrial and production applications



(FS-100C)

Powerful turbine motor

Produces ultra-high speed orbits for super-fine finishing of all materials

FS-100C



FS-50A



Specifications

Model	FS-100C	FS-50A
Air Pressure	85 PSI	85 PSI
Air Consumption	7.1 CFM	4.9 CFM
Free Speed	20,000 RPM	15,000 RPM
Orbit Diameter	1/16"	3/64"
Pad Size	4" x 4-3/8"	3" x 3-3/16"
Paper Size	4-1/2" x 5-1/2" (1/4 Sheet)	2-3/4" x 4-1/2" (1/8 Sheet)
Weight	1.1 lbs.	1.1 lbs.

Accessories Included

- Threaded Adapter PT1/4" x NPT1/4"
- Hose Sub Assembly
- Sample Sanding Papers

- Threaded Adapter PT1/4" x NPT1/4"
- Hose Sub Assembly
- Sample Sanding Papers

LINE SANDER

Ideal for inline and grain sanding applications



Features

- Ideal for most inline and profile sanding applications
- Compact and lightweight 1.6 lb. design
- Low vibration and minimal noise output
- Suitable for sanding steel, aluminum, wood, plastic and other materials
- Available with dust collection assembly

LS-10



Double Piston Alignment

Special double-action minimizes both noise and vibration.

Specifications


Model	LS-10
Air Pressure	85 PSI
Air Consumption	3.9 CFM
Stroke Speed	4,000 SPM
Stroke Length	5/32"
Pad Size	2-5/32" x 4-1/16"
Paper Size	2-1/4" x 5-1/2" (1/8 Sheet)
Weight	1.6 lbs.

Accessories Included

- Threaded Adapter PT1/4" x NPT1/4"
- Hose Barb
- Hose Sub Assembly
- Block Pad Assembly
- Sample Sanding Papers

Optional Accessories

- TB02244: Dust Collector

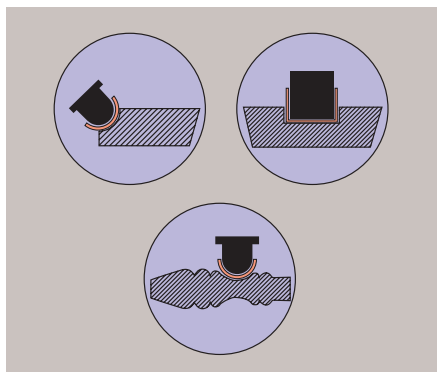

Special Sanding Pad

The Block Rubber Pad Assembly can be easily trimmed to conform to the shape being worked and is available as an accessory.

ORBITAL SANDER

Heavy-duty and powerful with adjustable speed regulator



OSV-60A



Features

- Powerful 3/4 horsepower dual action for tough applications
- Also available with 5" pad (OSV-50A)
- Standard with dust extraction system
- Rugged construction for reliable performance

Specifications


Model	OSV-60A
Air Pressure	85 PSI
Air Consumption (No load)	24.1 CFM
Free Speed	8,500 RPM
Orbit Diameter	3/8"
Paper Size	6" Diameter
Pad Type	PSA
Horsepower	.75 HP
Weight	4.4 lbs.

Accessories Included

- Threaded Adapter PT1/4" x NPT1/4"
- Dust Collection Assembly with Dust Bag
- Spanner Wrench (17 mm)

Random orbital action creates a professional finish

By offsetting the sanding pad shaft, fast aggressive sanding is achieved while dramatically reducing swirl patterns. Speed adjustments allow for the best speed for the best job.



PALM ORBITAL SANDER

Ergonomic lightweight design



APS-125/150



Non Vacuum

For Self-Vacuum & Central Vacuum

The non-vacuum model is available from stock and can easily be modified to self-vacuum or central vacuum.

Self-Vacuum



Central Vacuum



Features

- Compact and lightweight 1.6 lb. design
- Ergonomically designed for operator convenience and comfort
- Powerful high speed 10,000 RPM motor
- Ultra small orbital action for high quality swirl-free finishes
- Available with 5" or 6" pads
- Variable speed control

Applications

- Feather edging, metal preparation, and finishing work on body filler.
- Curved surface sanding and corner rounding in wood work.

Specifications

Model	APS-125	APS-150
Air Pressure	85 PSI	85 PSI
Air Consumption	15.9 CFM	15.9 CFM
Free Speed	10,000 RPM	10,000 RPM
Orbit Diameter	3/16"	3/16"
Paper Size	5" Diameter	6" Diameter
Pad Type	PSA	PSA
Spindle Thread	5/16"-24	5/16"-24
Horsepower	.37 HP	.37 HP
Weight	1.52 lbs.	1.59 lbs.

Accessories Included

- Threaded Adapter PT1/4" x NPT1/4"
- Spanner

Be sure to read and understand all safety precautions mentioned below and to follow the instructions given to operate each Nitto Kohki brand tool as stated in the operator's manual. Keep operators manual close by when operating machines or tools for reference of safe operation and precautions.

Safety Precautions

Failure to observe the following warnings may cause a potentially hazardous situation, which if not corrected, could result in serious injury or death. To prevent the risk of fire, electric shock, and/or personal injury, proper safety guidelines should be followed at all times.

Warning for ALL Machines and Tools

- Always keep the work area free from clutter and potentially dangerous conditions such as hanging power cords, working debris, air hoses, and garbage to prevent accidents from occurring.
- Consider proper working environments for each tool carefully. Do not expose tools to extreme amounts of moisture or direct contact with water or rain. Keep area well lit at all times to prevent hidden dangers and never operate the equipment near flammable liquids or in gaseous or explosive atmospheres.
- Keep all tools and tool accessories away from children and all unauthorized personnel. Serious injury or possible death may result from machines being handled by children.
- Properly store machines and accessories while not in use. They should be kept in a dry, locked-up location out of reach of children or unauthorized personnel.
- Improper or negligent use of tools will cause increased maintenance costs, and the amount of time in which to complete the job. Always let the tool do the work at the rate of which it was designed. Best performance is always achieved by reading and understanding the proper operation of each machine or tool.
- Always wear safety glasses and protective hand and foot wear during or around operating tools. Wear a protective hair covering to contain long hair. Do not wear loose clothing and/or accessories as they may be caught in moving parts and inflict serious injury or possible death.
- Wear respiratory protection when working in an environment where dust particles are generated during operation.
- Do not over-reach or allow yourself to become unstable during tool operation and always maintain a correct posture.
- Use clamps or a vise to secure the work piece tightly and eliminate vibration. Never hold the work piece with your hands, keep both hands on the tool for increased productivity.
- Use the right tool or machine that can complete the job within its specifications. Do not attempt to adapt smaller machines or tools to complete a job designed for heavy-duty equipment. Do not use the tools for other than what they were designed for. There is a right tool for each job, be aware of tool limitations and never overload.
- Make sure to inspect all external screws, nuts, bolts and attached accessories are fastened tightly and secure prior to each use. All moving parts should be free from obstruction and allowed to operate smoothly. Any damaged or missing parts should be repaired or replaced by the sales agent or distributor from which the tool was originally purchased. Do not use machines or tools which cannot be activated or stopped with a power switch or lever.
- Do not use any machine with a damaged, frayed, cut, or deteriorated power cords or air hoses. Always replace at the first sign of damage.
- Always remove all tools required to adjust, add, or remove parts from tools prior to use to prevent tool damage or user injury.
- Always avoid an unexpected start by having all power buttons or levers in the off position prior to attaching to a power or air supply. Never carry tools with your finger on the on/off switch or lever when the power or air supply is attached.
- Do not use the power or air supply lines to move, carry or support the tool during usage or transportation. Do not place the power or air line near a heat source, oil, water, or items with sharp edges.
- Never leave a machine or tool running unattended. Keep a firm grip on the designated areas of the machine or tool until it comes to a complete stop. Always turn the power switch or lever to the off position and disconnect from the power source when not in use.
- Do not disassemble or modify a tool to complete a job other than what it was designed for. This will void any warranty on the equipment and may cause serious personal injury or possible death.
- Maintenance is necessary for all machines and tools. Always maintain blades and cutters properly and replace when edges become damaged or are not sharp enough for safe operation. Follow the instruction manual for lubrication needs and adjustment points if applicable. Check the power and air supply lines periodically and change accordingly to safety regulations. If an extension line is adopted, always make sure that it meets or exceeds tool requirements for amperage or air supply before using and is rated for outdoor usage. Change supply lines whenever they are found to be defective or damaged. Keep the grip and handles dry and clean of grease or oil so that it will not disturb proper operation.
- Switch off and disconnect from power source before servicing equipment or changing accessories.
- Be alert and pay close attention to the work being performed at all times. Do not operate machines or tools when heavily fatigued. Users should be aware of all circumstances surrounding their application.
- Use only recommended parts and accessories as per individual machine or tool operator manuals. Use of improper accessories or attachments may result in serious injury or possible death.
- All repairs and services must be performed by authorized Nitto Kohki dealers or technicians.
- Do not deface or remove any label, warning indicator, or nameplate associated with each machine or tool.

Notice for Electric Tools

- The power source must be limited to the individual tools specifications as stated on the nameplate or instruction manual.
- Make sure that all machine and power tools are properly grounded at all times (excludes double-insulated tools). Always use a GFCI (Ground-Fault-Circuit-Interrupt) to protect the user and surrounding persons from electric shock.
- Be aware of low voltage situations. Improperly gauged extension cords or power cords used or shared with other electrical devices will cause all tools on the line to not run at optimal performance. This condition may result in damage to the machine and/or operator.

Notice for Air Tools

- Air pressure at the inlet of the tool must not exceed 0.6 MPa (85 PSI).

HI CUPLA / HI CUPLA 200 (One-touch connection & Big flow rate type)



- One-way shut-off cupla with an automatic shut-off valve in the socket.
- Important parts are hardened for excellent wear resistance and durability.

Plug P			
For hose connection		40PH	For 1/2" hose
17PH	For 1/4" hose	400PH	For 1/2" hose
20PH	For 1/4" hose	600PH	For 3/4" hose
30PH	For 3/8" hose	800PH	For 1" hose
For female thread connection		40PM	For Rc 1/2"
10PM	For Rc 1/8"	400PM	For Rc 1/2"
20PM	For Rc 1/4"	600PM	For Rc 3/4"
30PM	For Rc 3/8"	800PM	For Rc 1"
For male thread connection			
20PF	For R 1/4"	400PF	For R 1/2"
30PF	For R 3/8"	600PF	For R 3/4"
40PF	For R 1/2"	800PF	For R 1"
For male thread connection (parallel thread)			
20PFF	For G 1/4"		

Specifications

Type	Hi Cupla	Hi Cupla 200
Body material	Steel (chrome-plated)	Steel (chrome-plated)
Size	1/8", 1/4", 3/8", 1/2", 3/4", 1"	1/8", 1/4", 3/8", 1/2"
Working pressure	1.5 MPa	1.0 MPa
Pressure resistance	2.0 MPa	1.5 MPa
Packing material	NBR	NBR
Working temp.range	-20°C - 80°C	-5°C - 60°C

Socket S			
For hose connection		40SH	For 1/2" hose
17SH	For 1/4" hose	400SH	For 1/2" hose
20SH	For 1/4" hose	600SH	For 3/4" hose
30SH	For 3/8" hose	800SH	For 1" hose
For female thread connection		40SM	For Rc 1/2"
10SM	For Rc 1/8"	400SM	For Rc 1/2"
20SM	For Rc 1/4"	600SM	For Rc 3/4"
30SM	For Rc 3/8"	800SM	For Rc 1"
For male thread connection			
20SF	For R 1/4"	400SF	For R 1/2"
30SF	For R 3/8"	600SF	For R 3/4"
40SF	For R 1/2"	800SF	For R 1"

For hose connection			
200-17SH	For 1/4" hose	200-40SH	For 1/2" hose
200-20SH	For 1/4" hose		
200-30SH	For 3/8" hose		
For female thread connection			
200-20SM	For Rc 1/4"		
200-30SM	For Rc 3/8"		
200-40SM	For Rc 1/2"		
For male thread connection			
200-20SF	For R 1/4"		
200-30SF	For R 3/8"		
200-40SF	For R 1/2"		

HI CUPLA ACE



- Plastic Cuplas with a built-in locking mechanism!
- Pressure ratings comparable to steel Cuplas.

Specifications

Body material	Engineering plastics
Size	1/4", 3/8", others
Working pressure	1.5 MPa
Pressure resistance	2.0 MPa
Packing material	NBR
Working temp.range	-5°C - 60°C

Plastic Plug P			
For hose connection (PH)			
20PH-PLA	For 1/4" hose		
30PH-PLA	For 3/8" hose		
For female thread connection (PM)			
20PM-PLA	For Rc 1/4"		
30PM-PLA	For Rc 3/8"		
For urethane hose with spring nut connection (PNG)			
50PNG-PLA	For 5 ID × 8 OD hose		
65PNG-PLA	For 6.5 ID × 10 OD hose		
85PNG-PLA	For 8.5 ID × 12.5 OD hose		
For male thread connection (PF)			
20PFF-PLA	For G 1/4"		

Hi Cupla Ace Socket S			
For hose connection (SH)			
HA-20SH	For 1/4" hose		
HA-30SH	For 3/8" hose		
For female thread connection (SM)			
HA-20SM	For Rc 1/4"		
HA-30SM	For Rc 3/8"		
For urethane hose with spring nut connection (SNG)			
HA-50SNG	For 5 ID × 8 OD hose		
HA-65SNG	For 6.5 ID × 10 OD hose		
HA-85SNG	For 8.5 ID × 12.5 OD hose		
Hi Cupla Ace T type (for 2 branches)			
HA-T	20P-PLA / HA-65S × 2		

"delvo" Electric Screwdrivers, Linear-motor-driven Free Piston System

delvo *Professional Tools for High Technology*

NITTO KOHKI "delvo" Electric Screwdrivers are high-quality tools for professional use, with special emphasis on precise control of torque and long life. They apply just the correct amount of torque – with sure, positive control always at your fingertips. They're smooth and shockless in operation, too. NITTO KOHKI's customer-oriented service system is directly connected to sales agents to ensure that you can use "delvo" Electric Screwdrivers with confidence.

delvo Models

DLV7300 Series
DLV7500/8500 Series
DLV7000/8000 Series
DLV7100/7200/8100/8200 Series
DLV3100/3300 Series
DLV5720/5720H/5740/5740H/5750 Series
DLV5800 Series
DLV30SP/30HP-MKG (with built-in brushless motors)



Linear Motor Driven Free Piston System

MEDO USA, Inc. offers linear motor-free piston system air compressors and vacuum pumps, featuring unique, quiet, oil-free operation with high reliability and long life. This design theory uses a resonant spring mass piston assembly energized by a pulsating magnetic field. The functionally elegant design, with only one moving part, is ideally suited for a variety of applications.



About us

Nitto Kohki U.S.A., Inc. was founded in 1969 to provide sales and service of machine tools and quick-connecting fluid couplings that are designed and manufactured by Nitto Kohki Company, Ltd. located in Tokyo, Japan. We attained a position at the forefront of the industry, pioneering the development of unique, high quality products based on the core technologies of fluid mechanics, precision engineering and, more recently, electronic engineering. Through our products, Nitto Kohki has

consistently offered customers advantages in terms of labor savings, improved working environments and efficient manufacturing.

Nitto Kohki's products fulfill vital roles in fields ranging from applications in the construction industry and the automotive industry, to high-tech engineering. We will continue to capitalize on these favorable trends and precisely meet market needs in a timely manner.



Nitto Kohki Worldwide

Nitto Kohki Group... a corporation rising to the challenge of creating products and building a better tomorrow by responding to the needs of today. With the incessant challenge of developing energy and labor saving technology, we will contribute to society in a variety of ways through original technology that corresponds to users' needs.



Visit nittokohki.com for live demo session videos!



Nitto Kohki U.S.A., Inc.
46 Chancellor Drive, Roselle, IL 60172 U.S.A.
Phone: (630) 924-9393 Toll Free: (800) 323-8828 Fax: (630) 924-0303
info@nittokohki.com www.nittokohki.com

DISTRIBUTED BY